

# Keysight X-Series Signal Analyzers

This manual provides documentation for the following Analyzers:

PXA Signal Analyzer N9030A  
EXA Signal Analyzer N9010A  
MXE EMI Receiver N9038A

MXA Signal Analyzer N9020A  
CXA Signal Analyzer N9000A

Notice: This document contains references to Agilent. Please note that Agilent's Test and Measurement business has become Keysight Technologies. For more information, go to [www.keysight.com](http://www.keysight.com).

## Notices

© Keysight Technologies 2008-2014

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Keysight Technologies, Inc. as governed by United States and international copyright laws.

## Manual Part Number

N9020-90095

## Print Date

August 2014

Supersedes: March 2014

Printed in USA

Keysight Technologies Inc.  
1400 Fountaingrove Parkway  
Santa Rosa, CA 95403

## Warranty

**THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED “AS IS,” AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, KEYSIGHT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. KEYSIGHT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR ANY INFORMATION CONTAINED HEREIN. SHOULD KEYSIGHT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS COVERING THE MATERIAL IN THIS DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT WILL CONTROL.**

## Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

## Restricted Rights Legend

If software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as “Commercial computer software” as defined in DFAR 252.227-7014 (June 1995), or as a “commercial item” as defined in FAR 2.101(a) or as “Restricted computer software” as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Keysight Technologies’ standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

## Safety Notices

### CAUTION

A **CAUTION** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in damage to the product or loss of important data. Do not proceed beyond a CAUTION notice until the indicated conditions are fully understood and met.

### WARNING

A **WARNING** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in personal injury or death. Do not proceed beyond a WARNING notice until the indicated conditions are fully understood and met.

## Where to Find the Latest Information

Documentation is updated periodically. For the latest information about these products, including instrument software upgrades, application information, and product information, browse to one of the following URLs, according to the name of your product:

<http://www.keysight.com/find/pxa>

<http://www.keysight.com/find/mxa>

<http://www.keysight.com/find/exa>

<http://www.keysight.com/find/cxa>

<http://www.keysight.com/find/mxe>

To receive the latest updates by email, subscribe to Keysight Email Updates at the following URL:

<http://www.keysight.com/find/emailupdates>

Information on preventing analyzer damage can be found at:

<http://www.keysight.com/find/PreventingInstrumentRepair>

## Is your product software up-to-date?

Periodically, Keysight releases software updates to fix known defects and incorporate product enhancements. To search for software updates for your product, go to the Keysight Technical Support website at:

<http://www.keysight.com/find/techsupport>



# Table of Contents

## List of Instrument Messages 7

### 1 Introduction

Event vs. Condition Messages	21
Event and Condition Categories	22
Event Message Format	23
Event Queues	24

### 2 Instrument Messages

Advisory Messages	28
Event Messages	32
-800, Operation Complete Event	33
-700, Request Control Event	33
-600, User Request Event	33
-500, Power on Event	33
-400 to -499, Query Errors	33
-300 to -399, Device-Specific Errors	34
-221 Settings Conflict Errors	36
-200 to -299, Execution Errors	45
-100 to -199, Command Errors	54
0 Error	55
Condition Messages	56
Condition errors 1 to 99, Calibration	56
Condition Errors 6 to 34, Calibration Skipped	56
Condition Errors 36 to 64, Calibration Needed or Failed	57
Condition Errors 65 to 92, Calibration Needed (Extended)	58
Condition Errors 67 to 95, Calibration Failure (Extended)	59
Condition Errors 101 to 199, Measurement Integrity	59
Condition Errors 201 to 299, Signal Integrity	62
Condition Errors 301 to 399, Uncalibrated Integrity	65
Condition Errors 401 to 499, Power	67
Condition Errors 501 to 599, Frequency	68
Condition Errors 601 to 699, Error Summaries	69
Condition Errors 701 to 799, Operation	70
Condition Errors 801 to 899, Temperature	71

### 3 Status Register System & SCPI STATus Subsystem

Where to find Detailed Information	73
Status Register System Overview	74

# Contents

## Appendix A References

Documents & Web Sites 77

## List of Instrument Messages

This list includes every Instrument Message described in this document, in alphabetical order.

2nd LO Unlocked	68
AC coupled: Accy unspec'd <10 MHz	66
ADC Alignment Failure	57
Align 30MHz to 1GHz failed	59
Align 30MHz–1GHz required	58
Align 9kHz to 30MHz failed	59
Align 9kHz–30MHz required	58
Align Now, All required	58
Align Now, RF required	58
Align RF Skipped	56
Align Skipped Sum Summary	58
All Auto/Man functions have been set to Auto	28
All ranges are off. Turn on at least a range	46
Allowable Center Frequency exceeded for the current span	28
Allowable Span exceeded for the current center frequency	28
Allowable Start Frequency exceeded for the current span	28
Allowable Stop frequency exceeded for the current span	28
Already in Single, press Restart to initiate a new sweep or sequence	28
Arm deadlock	48
Arm ignored	47
At Full Zoom	46
At Full Zoom	46
Auto sweep time rules do not apply in FFT sweeps	28
Band Adjust has no effect on a Fixed marker	28
Band Adjust has no effect with Mkr Function Off	28
Band-pass filter set to OFF	28
Block data error	55
Block data not allowed	55
Burst Not Found	63
Burst not found;with selected Time Slot	63
Cal Cancelled; Calibration data cleared	28
Cal Invalid: meas freq pt(s) > 3.6GHz are > 50MHz from existing Cal pts	28
Calibrating	70
Calibration failed	35
Calibration failed; <failure msg> <port>	35
Calibration memory lost	35
Calibration Oscillator Unlocked	68
Calibration	67

## List of Instrument Messages

Calibration	70
Calibration; ENR table extrapolated	67
Calibration; No ENR data present	67
Cannot create program	53
Carrier power is too low for optimum dynamic range.	28
Carrier(s) incorrect or missing	63
Character data error	54
Character data not allowed	55
Character data too long	55
Characterize Preselector failure	59
Command error	54
Command header error	54
Command protected	47
Command protected; feature not licensed	47
Communication error	35
Communication error; SNS data read failure. Disconnect then reconnect SNS	35
Communication error; SNS is not connected	36
Configuration memory lost	35
Connecting to source...	28
Corrupt media	52
Data corrupt or stale; Measurement data is not available	49
Data corrupt or stale; Trace contains no data.	49
Data corrupt or stale; Unable to load state from file	49
Data corrupt or stale;	49
Data out of Range; clipped to source max/min	48
Data out of range; Invalid list data	48
Data out of range; Two entries already exist at this x-axis value.	48
Data out of range;	48
Data questionable	50
Data type error	54
DC Coupled	71
De-emphasis only available in FM	36
Demod Error	64
Demod Error;Acq Time too short	65
Demod Error;Can't correlate	64
Demod Error;Data interval too short	65
Demod Error;Muxed bits not found	65
Demod Error;No active channel	65
Demod Error;No full subframe found	65
Demod Error;Not an active slot	65
Demod Time is not available in Zero Span	28
Demodulation	69
Detector <X> changed due to physical constraints	29
Device-specific error	34

Directory full	52	
Dynamic range is not optimum. Set AUTO RF input.	29	
Execution Error	46	
Execution error; Carrier frequency outside device's transmit band	46	
Execution error; Invalid GSM burst timing	46	
Execution error; Invalid IP address	46	
Execution error; Invalid Marker Trace.	46	
Execution Error; No peak found.	46	
Execution error; No ranges are defined. Activate a range.	46	
Execution Error; Preselector centering failed	46	
Execution Error; Signal not stable enough to track	46	
Execution Error; Store ref trace before turning on Normalize	46	
Execution error; Sync word was not found.	47	
Execution error; Trace file contains no compatible traces.	47	
Execution error; Trace file created by incompatible version of Phase Noise App	47	
Exp. Averaging not available when AUTO PhNoise is active.	29	
Exponent too large	54	
Expression data not allowed	55	
Expression error	52	
Expression error	55	
Extended Align Failure Summary	57	
Extended Align Needed Summary	57	
FFT Width is not settable unless Sweep Type is set to FFT	29	
File <filename> saved	29	
File name error; Allowable extension is .csv	52	
File name error; Allowable extension is .png	52	
File name error; Allowable extension is .state	52	
File name error; Invalid file name	52	
File name error; name too long	52	
File name error;	52	
File name not found;	52	
Filter BW function is only available for Gaussian filter type	29	
Fixed LO freq should be greater than RF Stop freq	29	
FM Demod Alignment Failure	57	
Framing error in program message	36	
Freq Out of Range	63	
Freq Out of Range; External LO	64	
Freq Out of Range; System input (IF)	63	
Freq Scale Type=Log is not available in Zero Span	29	
Frequency Hopping enabled, waiting for valid burst	29	
Frequency menu has changed to reflect frequency context switch	29	
Frequency Reference Unlocked	68	
Frequency	70	
Function not available before Marker Zoom is performed	47	

## List of Instrument Messages

Function not available in Zero Span	36
Gate required for valid results	29
GET not allowed	54
Hardware error	50
Hardware error; See details in Windows Event Log under SA	50
Hardware missing	50
Hardware missing; Input not available	50
Hardware missing; Internal preamp not available at all frequency points	50
Hardware missing; not available for this model number	50
Hardware missing; Option not installed	50
Header separator error	54
Header suffix out of range	54
High-pass and Low-pass filters set to OFF	29
High-pass filter set to OFF	29
I/O Error	61
I/O Error; Ext Source needs IP Addr	61
IF Alignment Failure	57
IF Fixed freq should be greater than LO Stop freq	29
IF Fixed freq should be greater than RF Stop freq	29
IF Start freq should be greater than LO Fixed freq	29
IF Start freq should be greater than RF Start freq	29
IF Synthesizer Unlocked	68
Illegal macro label	52
Illegal parameter value	48
Illegal parameter value; <Value> invalid. Fractional values are not allowed.	48
Illegal parameter value; <value> out of range.	48
Illegal parameter value; Exceeding the max list length	48
Illegal parameter value; Gated FFT is not available while Sweep Type is set to Swept	48
Illegal parameter value; Gated LO is not available while Sweep Type is set to FFT	48
Illegal parameter value; Gated Video is not available while Sweep Type is set to FFT	48
Illegal parameter value; Illegal identifier <identifier>. This value may already be in use.	49
Illegal parameter value; Index out of range	49
Illegal parameter value; Invalid list length	49
Illegal parameter value; LXI Event <event> already exists.	49
Illegal parameter value; LXI Event <event> contains illegal characters.	49
Illegal parameter value; LXI Event <event> does not exist.	49
Illegal parameter value; Measurement not available	49
Illegal parameter value; This instrument is always DC coupled	49
Illegal parameter value; This model is always AC coupled	49
Illegal program name	53
Illegal variable name	53
Incompatible type	53
Init ignored	47
Input Attenuation not calibrated	58

Input buffer overrun	36	
Input is internal	30	
Input Overload	60	
Input Overload; RF Preselector Overload	60	
Input Overload;ADC over range	60	
Input Overload;l/Q ADC over range	60	
Input Overload;l/Q Voltage over range	60	
Insufficient Data	60	
Insufficient Data; ENR table empty	61	
Insufficient Data; frequency list empty	61	
Insufficient Data; Incr. Demod Time	60	
Insufficient Data; Loss table empty	61	
Integrity	70	
Invalid block data	55	
Invalid character data	55	
Invalid character in number	54	
Invalid character	54	
Invalid Data	61	
Invalid expression	55	
Invalid format	50	
Invalid format; Map information not loaded	50	
Invalid inside macro definition	55	
Invalid outside macro definition	55	
Invalid separator	54	
Invalid string data	55	
Invalid suffix	54	
Invalid version	50	
Invalid while in local	47	
List not same length	49	
LO Alignment Failure	57	
LO Fixed freq should be greater than IF Stop freq	30	
LO Fixed freq should be greater than RF Stop freq	30	
LO Start freq should be greater than IF Fixed freq	30	
LO Start freq should be greater than RF Start freq	30	
LO Stop freq should be greater than RF Stop freq	30	
LO Unleveled	68	
LO Unlocked	68	
Low-pass filter set to OFF	30	
Macro definition too long	52	
Macro error	52	
Macro error	55	
Macro execution error	52	
Macro header not found	52	
Macro parameter error	52	

## List of Instrument Messages

Macro parameter error	55
Macro recursion error	52
Macro redefinition\ not allowed	52
Macro syntax error	52
Mass storage error; Access denied	50
Mass storage error; Bad path name	50
Mass storage error; Can only import single trace .csv files	50
Mass storage error; Can only load an Antenna Unit into Correction 1	50
Mass storage error; Cannot make	50
Mass storage error; Different Antenna Unit already in use	50
Mass storage error; Directory not found	50
Mass storage error; Failed to Load trace. Bad file format.	51
Mass storage error; File <filename> and instrument version mismatch	51
Mass storage error; File <filename> wrong type	51
Mass storage error; File contains incorrect data for this operation	51
Mass storage error; File empty	51
Mass storage error; Invalid register number for *SAV or *RCL Mass Storage error	51
Mass storage error; Lock violation	51
Mass storage error; Mkr Table must be on to save Mkr Table as Meas Results	51
Mass storage error; No file names available	51
Mass storage error; Open failed	51
Mass storage error; Pk Table must be on to save Pk Table as Meas Results	51
Mass storage error; Read fault	51
Mass storage error; Register <number> empty	51
Mass storage error; Sharing violation	51
Mass storage error; Spectrogram must be on to save as Meas Results	51
Mass storage error; Too many open files	51
Mass storage error; Write fault	51
Mass storage error;	50
Math error in expression	52
Meas Error	61
Meas Uncal	66
Measuring	70
Media full	52
Media protected	52
Memory error	35
Memory Error	61
Memory Error;Shorten capture interval	61
Memory use errors	53
Missing media	51
Missing parameter	54
Must perform Scan before do Search	47
No error	55
No Long Code Phase	66

No marked signal	47	
No Measure At Marker Added to Signal List	47	
No Peak Added to Signal List	47	
No Result	60	
No Result; Meas invalid with I/Q inputs	60	
No Result; Turn on MCE	60	
No spurs have been found	30	
Numeric data error	54	
Numeric data not allowed	54	
Operation complete	33	
Operation complete; Loaded <ARB filename> successfully, but no license <required licenses> installed	33	
Out of memory	35	
Out of memory	49	
Out of memory	53	
Out of memory; Insufficient resources to load Mode <mode name>	49	
Out of memory; Memory limit caused Data Acquisition to be truncated	49	
Parameter error	48	
Parameter not allowed	54	
Parity error in program message	36	
Paused	70	
Power on	33	
Power	69	
Preamp: Accy unspec'd <XX kHz	67	
Preparing Calculation...	30	
Preselector is centered	30	
Preselector not used in this frequency range.	30	
Probe connected, cal data is being reapplied; <port>; <probe>	30	
Probe connected, no probe cal; using cable cal data; <port>; <probe>	30	
Probe disconnected, reverting to cable calibration data; <port>	30	
Program currently running	53	
Program error	53	
Program mnemonic too long	54	
Program runtime error	53	
Program syntax error	53	
PUD memory lost	35	
Query DEADLOCKED	33	
Query Error	33	
Query INTERRUPTED	33	
Query UNTERMINATED after indefinite response	33	
Query UNTERMINATED	33	
Queue overflow	35	
Reading SNS data...	30	
Recalled File <filename>	30	
Ref missing or out of range	69	

## List of Instrument Messages

Ref missing or out of range; External	69
Ref missing or out of range; Pulse	69
Refer to online help for assistance with DSB measurements	30
Reference Oscillator Oven Cold	71
Referenced name already exists	53
Referenced name does not exist	53
Request control	33
Requested timeslot number is not present.	30
RF Alignment Failure	57
RF Start freq should be greater than IF Fixed freq	31
RF Start freq should be greater than IF start freq	31
RF Start freq should be greater than LO fixed freq	31
RF Start freq should be greater than LO Start freq	31
RF Stop freq should be greater than IF Stop freq	31
RPP Tripped	67
Save/recall memory lost	35
Scale/Div only applies in Log Y Scale	31
Self-test failed	35
Setting conflict; <trigger source> trigger is not available while input is <input port>	36
Setting conflict; Differential setting determined by probe type	36
Setting conflict; Input Z unavailable when probe sensed	36
Setting Modified	62
Setting Modified; Filter not applied	62
Settings Alert	61
Settings Alert; Acquisition truncated	61
Settings Alert; Analog Out settings conflict	61
Settings Alert; Diff probe mismatch; <I Q I,Q>	61
Settings Alert; Freq>USB Preamp max	62
Settings Alert; Span:RBW Ratio too big	62
Settings Alert; Src pwr ramp>ALC range	62
Settings Alert; Sweep Rate Unavailable	62
Settings Alert;I/Q mismatch:<Differential Input Z Attenuation>	62
Settings Alert;LO may overload IF	61
Settings Alert;Parm/data mismatch	62
Settings conflict; *.CSV file format is not available in this measurement.	36
Settings conflict; <Q Param> cannot be changed when Q same as I	36
Settings conflict; A Valid User Cal is required. Optimize aborted	36
Settings conflict; Auto Tune not available in Tracking Source mode	37
Settings conflict; BTS gain is not available in this Mode	37
Settings conflict; Cal only available when Source Mode is Tracking	37
Settings conflict; Calibration cannot be performed without valid ENR data	37
Settings conflict; Can't Auto-Couple Res BW in Zero Span	37
Settings conflict; Cancellation is not available while measuring DANL floor.	37
Settings conflict; Cancellation Ref trace has no data.	37

Settings Conflict; Cancellation trace has different X-Scale	37	
Settings conflict; Cannot optimize while user cal in progress	37	
Settings conflict; Carrier freq not allowed with BMT. (Bottom/Middle/Top only)		37
Settings Conflict; Code channel duplication	37	
Settings conflict; Continuous Peak is not available with Fixed marker	37	
Settings conflict; Continuous Peak is not available with Signal Track on	37	
Settings conflict; Destination trace for Trace Math cannot be a trace operand		37
Settings conflict; Downconv only available when DUT is Amplifier	38	
Settings conflict; EDGE EVM only supports EDGE TCH burst type.	38	
Settings conflict; Electronic attenuator is disabled	38	
Settings conflict; Electronic attenuator is not available above 3.6 GHz	38	
Settings conflict; Electronic attenuator unavailable in current state	38	
Settings conflict; Electronic attenuator unavailable with Preamp on	38	
Settings conflict; EMI Detectors are not available in FFT sweep	38	
Settings conflict; External Mixer not available	38	
Settings Conflict; FAST method can only be used while Radio Std is W-CDMA		38
Settings conflict; Feature not available in this View	38	
Settings conflict; Feature not supported for selected source	38	
Settings conflict; Feature not supported for this Input.	38	
Settings conflict; Feature not supported for this measurement.	38	
Settings conflict; Feature not supported for this model number	38	
Settings conflict; FFT IF Gain High not available when Swept IF Gain = Manual Low		39
Settings conflict; FFT method is unavailable for level gating	39	
Settings conflict; FFT sweep type is not available while in Gated LO	39	
Settings conflict; FFT sweep type is not available while in Gated Video	39	
Settings conflict; FFT Sweeps unavailable in Tracking Source mode	39	
Settings conflict; Fixed marker adjust not available while Marker Function is on		39
Settings conflict; Fixed Marker Y value is not adjustable with Normalize On		39
Settings conflict; Freq > 3.6 GHz unavailable while electronic attenuator enabled		39
Settings conflict; Function not available in External Mixing	39	
Settings conflict; Function not available in Tracking Source mode	39	
Settings conflict; Function only available in Tracking Source mode	39	
Settings conflict; Function unavailable with MW Presel off	39	
Settings conflict; Gate control is Edge for Gated FFT	39	
Settings conflict; Gate control must be Edge for this Gate Source	39	
Settings conflict; Gate is not available when Marker Count on	40	
Settings conflict; Gate Length is not settable in FFT sweeps	40	
Settings conflict; Gate Length is not settable in FFT sweeps	40	
Settings conflict; Gate Method is not compatible with current Sweep Type setting		40
Settings conflict; Gate not available with external Tracking Source	40	
Settings conflict; Gate not available with Tracking Generator	40	
Settings conflict; Gated FFT is not available while Sweep Type is set to Swept		40
Settings conflict; Gated LO is not available while Sweep Type is set to FFT		40
Settings conflict; Gated Video is not available while Sweep Type is set to FFT		40

## List of Instrument Messages

Settings conflict; Incorrect RBW for demod. Change RBW	40
Settings conflict; Ind I/Q is not available for this measurement	40
Settings conflict; Invalid trace number	40
Settings conflict; Knob is not available to modify this function	40
Settings conflict; LO Phase Noise Adj not available	40
Settings conflict; Marker 1 Trace Update=off turns off Signal Track	40
Settings conflict; Marker cannot be relative to itself	41
Settings conflict; Marker Count is not available when Gate on	41
Settings conflict; Marker Function is not available for a Fixed marker	41
Settings conflict; Marker type must be delta	41
Settings conflict; Marker-> function is not available in zero span	41
Settings conflict; Mask unavailable for current Span. Increase to display mask.	41
Settings conflict; Meas Type was changed to Examine for Exp Avg Mode.	41
Settings conflict; Meas Type was changed to Full for Repeat Avg Mode	41
Settings Conflict; MinPts/RBW limit not met	41
Settings conflict; Mkr -> CF is not available when the x-axis is time domain	41
Settings conflict; Mod Scheme AutoDet unavailable when Burst Sync=RF Amptd	41
Settings conflict; MS gain is not available in this Mode	41
Settings conflict; Must apply Amplitude Correction to make this unit available	41
Settings conflict; No meas frequencies are above 3.6 GHz	41
Settings conflict; no source selected	41
Settings conflict; Normalize is not available when Scale Type = Lin	42
Settings conflict; Normalize is not available while Demod View is on	42
Settings conflict; Normalize is not available while Trace Math is on	42
Settings conflict; Only active Antenna Unit available; no other Y axis units	42
Settings conflict; Option not available	42
Settings conflict; Param only available when DUT is a freq converter	42
Settings conflict; Param only available when External LO Mode is Fixed	42
Settings conflict; Param only available when External LO Mode is Swept	42
Settings conflict; Param only available when Frequency Mode is Fixed	42
Settings conflict; Param only available when Frequency Mode is Swept	42
Settings conflict; Param only available when valid cal data exists	42
Settings conflict; Preamp gain is not available in this Mode	42
Settings conflict; Preamp unavailable with electronic attenuator on	42
Settings conflict; Reference marker must be in same window	42
Settings conflict; Relative Trigger needs hardware support for this meas	43
Settings conflict; Scale Type = Lin is not available when Normalize is on	43
Settings conflict; Settings conflict; Pre-trigger is insufficient for demod. Decrease Trig Delay.	43
Settings conflict; Signal Track is not available with Continuous Peak	43
Settings conflict; Signal Track is only available in Swept SA measurement	43
Settings conflict; Signal Track is turned off when Zero Span is selected	43
Settings Conflict; Span limited to XXX	43
Settings conflict; Span Zoom is not available in Zero Span	43
Settings conflict; Step keys are not available to modify this function	43

Settings conflict; Sweep Setup only available in swept measurements	43
Settings conflict; Sweep Time cannot be auto-coupled in FFT sweeps	43
Settings conflict; Sweep Time cannot be auto-coupled while in Zero Span	43
Settings conflict; Sweep Time cannot be set while in FFT sweeps	43
Settings conflict; Swept IF Gain High not available when FFT IF Gain = Manual Low	44
Settings conflict; Swept LO not available when freq mode is Fixed	44
Settings conflict; Swept Type=Swept is not available while in Gated FFT	44
Settings conflict; System Display Settings, Annotation is Off	44
Settings conflict; T hot must be greater than T cold	44
Settings Conflict; The parameter cannot be changed in FAST mode	44
Settings conflict; Trace Math is not available while Normalize is on	44
Settings conflict; Tracking Source unavailable in FFT Sweeps	44
Settings conflict; Trigger input in use for source synchronization	44
Settings conflict; Trigger is not available with span > 0 Hz.	44
Settings conflict; Tx Band Spur meas does not support this frequency band.	44
Settings conflict; Tx Band Spur measurement is not defined for mobiles.	44
Settings conflict;	36
Settings conflict;	48
Settings conflict;Administrator privileges required	44
Settings conflict;Auto Scan Time/Meas Time do not apply in Stepped Scan Type.	44
Settings conflict;Auto Scan Time/Meas Time do not apply in Stepped Scan Type.	45
Settings conflict;ClearList & Start not available when ScanSeq = (Re)measure	45
Settings conflict;EMI Detectors and Average detector can't be used together	45
Settings conflict;Freq > 1 GHz is not available while RF Input 2 enabled	45
Settings conflict;Function not available while measurement is running	45
Settings conflict;function unavailable with this EMC Standard	45
Settings conflict;Log Percent Auto Step Rule does not apply in Swept Scan Type.	45
Settings conflict;QPD + EMI Average + RMS Average is not allowed	45
Settings conflict;Range <0> is turned off as total range points > 40001	45
Settings conflict;RF Input 2 is not available above 1GHz	45
Settings conflict;Scan Time & Points do not apply in current Step/Time Control.	45
Settings conflict;Step Size & Meas Time do not apply in current Step/Time Control.	45
Settings lost due to rtl	47
Settling	70
Signal ID on	66
Signal List is Empty	47
Signal List is Full	47
Signal Selected is not in the Signal List	47
Signal Summary	60
Signal Too Noisy	65
Signal Track is turned off when Zero Span is selected	31
Signals deleted	31
Slot Error	65
Slot Error; No idle slot found	65

## List of Instrument Messages

Slot error;No active slot found	65
Source LO Unleveled	68
Source Sweeping	71
Source Synth Unlocked	68
Source Uncal	67
Source Uncal;adj Start Freq or RBW	67
Source Unleveled	67
Source Waiting for Trigger	71
Storage fault;	35
String data error	55
String data not allowed	55
Suffix error	54
Suffix not allowed	54
Suffix too long	54
Sweep Points/Span is < minimum. Results may be inaccurate.	31
Sweep Setup is not available in Zero Span	31
Sweeping	70
Sync Error	64
Sync Error;Midamble sync fail	64
Sync Error;No freq ref pilot burst	64
Sync Error;No pilot burst	64
Sync Error;Preamble length zero	64
Sync Error;Sync code not found	64
Sync is RF Ampl (not Training Sequence). Bits are not accurate.	31
Syntax error	54
System error; A license will soon expire;<feature code> will expire in <time>	34
System Error; enable GPIB controller mode	34
System error; Error transmitting a LAN event to the network.	34
System error; Failed to initialize the PTP clock to current time.	34
System error; Failed to instantiate the PTP ordinary clock.	34
System error; feature <feature code> not licensed	34
System error; Feature expired; <feature code>	34
System error; License installation failed;<feature code>	34
System error; License removal failed; <feature code>	34
System error; No license; <feature code> will terminate in <time>	34
System Error; No supported source found	34
System Error; source connection lost, check interface connection	34
System error; The configured PTP hardware driver could not be instantiated.	34
System error; The PTP hardware driver reported a configuration error.	34
System error; The PTP ordinary clock reported a configuration error.	35
System error; The Trigger alarm delayed LAN event was not scheduled due to a conflict with an existing scheduled alarm.	35
System error; The Trigger alarm delayed LAN event was not scheduled due to an existing pending event.	35
System error; The Trigger alarm was not scheduled due to a conflict with an existing scheduled alarm.	35
System error;	34

Temperature	69	
TG Alignment Failure	57	
Time out error	36	
Timing Error	63	
Timing Error:No time ref pilot burst	63	
Too many digits	54	
Too much data	48	
Too much data; 200 spurs found. Additional spurs ignored.	48	
Trace file saved.	31	
Trig Error	61	
Trigger deadlock	47	
Trigger error	47	
Trigger ignored	47	
Uncalibrated Summary	60	
Undefined header	54	
Unexpected number of parameters	54	
Use Gate View Sweep Time in the Gate menu.	31	
User Cal valid. Apply Cal from Meas Setup menu	31	
User cal	66	
User Cal; Adjusted for new RBW	66	
User Cal; Cal invalidated	66	
User Cal; Cal will be interpolated	66	
User Cal; Freq outside cal range	66	
User request	33	
Waiting for Arm	70	
Waiting for Trigger	70	

## List of Instrument Messages

# 1 Introduction

The Error and Status messaging system of the instrument reports events and conditions in a consistent fashion, as well as logging and reporting event history.

This chapter contains the following topics:

- “Event vs. Condition Messages” on page 21
- “Event and Condition Categories” on page 22
- “Event Message Format” on page 23
- “Event Queues” on page 24

## Event vs. Condition Messages


- An Event is simply a message indicating that something has happened. Events are sub-divided according to their severity, into Error, Warning or Advisory categories. The sub-divisions are described in more detail in the section “Event and Condition Categories” on page 22.

Event messages appear in the Message Line at the bottom left of the instrument’s display window, as shown in Figure 1-1 below.

- A Condition is a state of the instrument, which is characterized by a Detection event and a Clearing event. Conditions may be Errors or Warnings.

Condition messages appear in the Status Panel at the bottom right of the instrument’s display screen, as shown in Figure 1-1 below.

Figure 1-1 Instrument Message Line & Status Panel

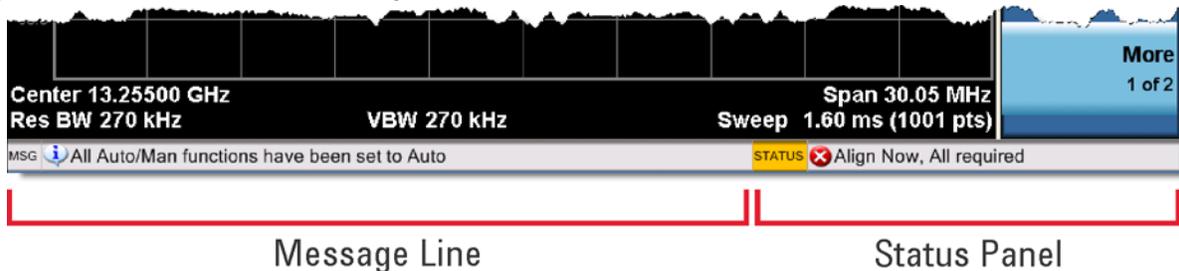

## Event and Condition Categories

The three categories of severity are described below, for both Events and Conditions.

### Errors



Error messages appear when a requested operation has failed. (For example, “Detector not available”, “File not saved”.) Error messages are often generated during remote operation when an invalid programming command has been entered. (For example, “Undefined header”.)

Some errors are conditions rather than single events. They exist for a period of time, so they have associated “Detected” and “Cleared” events. (For example, “LO Unlocked” or “External reference out of range”.)

Error messages appear in the Status Panel at the bottom of the display. A message remains until you press a key, or another message is displayed in its place.

Error messages are logged in the error queues. If the error is a condition, both the Detected and Cleared events are logged.

---

### Warnings



Warning messages appear when a requested operation has completed successfully, but there are modifications and/or side effects. (For example, if you requested too high a stop frequency, then “Data out of range” is displayed and the analyzer sets itself to the highest available stop frequency.)

Some warnings are conditions rather than single events. They exist for a period of time, so they have a “Detected” event and a “Cleared” event. (For example, if you set the sweep time too fast for a measurement to meet the instrument specifications then the “Meas Uncal” message is displayed until you slow down the sweep time.)

Warning messages appear in the Status Panel at the bottom of the display. The message remains until you press a key, or another message is displayed in its place.

Warnings are logged in the error queues. If the warning is a condition, both the Detected and Cleared event messages are logged.

---

### Advisories



Advisory messages tell the front panel user some useful information. (For example, “File saved successfully” or “Measuring the fundamental”.)

Advisory messages appear in the Status Panel at the bottom of the display. The message remains until you press a key, or another message is displayed in its place.

Advisory messages are not logged in the error queues.

Grayout messages are a special type of Advisory, which appear when you attempt to access a function that is not available. This could be a grayed out front panel key, or an inappropriate SCPI command. There are two types of grayout messages: Benign and Forced.

1. **Benign:** the requested function is not available because it does not make sense with the current instrument settings. Changing it does not affect the current measurement. (For example, setting the number of FFTs/Span when you are not in the FFT mode.)

A benign grayout gives an Advisory type of message only when the front panel key is pressed.

The requested function cannot be changed from the front panel, but it can be changed remotely.

2. **Forced:** the requested function is not available either because changing it would cause an invalid measurement, or because of hardware limitations, or because the selection conflicts with other settings. (For example, selecting the electrical attenuator when the frequency span includes frequencies above 3.6 GHz.)


A forced grayout function cannot be changed either from the front panel or remotely. It generates a special type of Advisory message. It also only appears on the front panel when the key is pressed. Remotely, the message will appear in the event queue as a warning “-221, Settings conflict; <conflict description>”.

## Event Message Format

The event messages are listed in numerical order according to their message number. Advisory messages do not have numbers, and are listed in alphabetical order.

An explanation is included with each error to further clarify its meaning. Some errors are specified in industry standards, and may include references to Section 21.8 of the [1999 SCPI Syntax & Style Standard](#).

Figure 1-2 Error Message Example

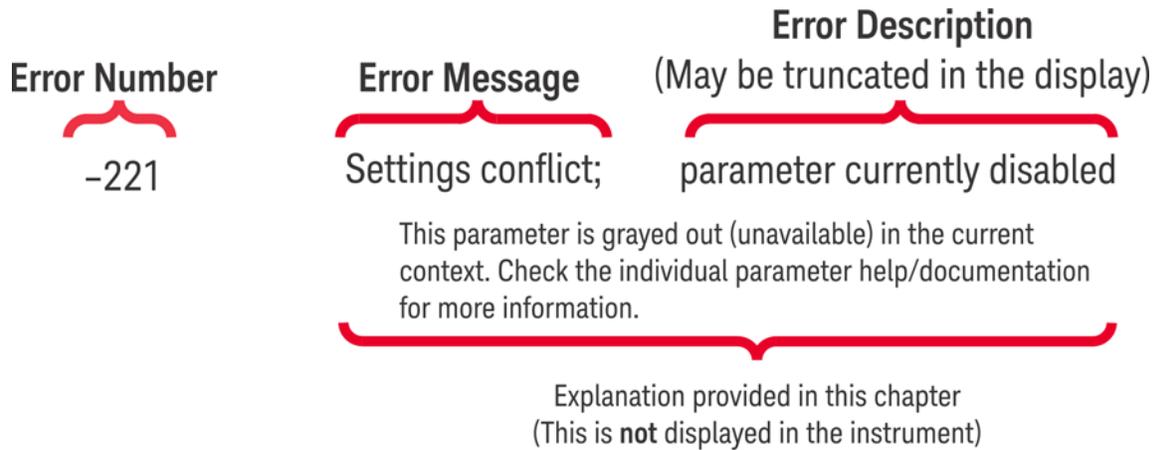

## Event Queues

There are several different event queues that are viewed/queried and managed separately. Note that Conditions are logged in the queues as pairs of events: a “Detected” event and a corresponding “Cleared” event.

Table 1-1 Event Queue Types

<b>Front Panel Status</b>	Error messages can be viewed by pressing, <b>System, Show Errors, Status</b> . The Status screen shows error conditions that currently exist. When an error event is caused by a command sent over a remote interface, the resulting messages are logged in the queue for that interface. For convenience, they are also logged in the front panel queue.
<b>Front Panel History</b>	Error messages can be viewed by pressing, <b>System, Show Errors, History</b> . The History screen shows all the error events that have occurred since the instrument was turned on, with a maximum of 100 messages. When an error situation is caused by a command sent over a remote interface, the resulting messages are logged in the queue for that interface. For convenience, they are also logged in the front panel queue.
<b>Remote interfaces (GPIB/LAN)</b>	When an error event is caused by a command sent over a remote interface, the resulting messages are output to the queue for that interface. To return an error, you must query the queue for that interface. An error event that is caused by a front panel action is not reported to any remote interface queue. However, a status condition is usually caused by an internal event that is not related to a particular interface, so the Detected/Cleared events for status conditions are reported to all the error queues.

Table 1-2 Characteristics of the Event Queues

Characteristic	Front-Panel Status	Front-Panel History	Remote Interfaces (GPIB/LAN)
Capacity (maximum number of messages)	100	100	100
Overflow Handling	Circular (rotating). Drops oldest error as new error comes in.	Circular (rotating). Drops oldest error as new error comes in.	Linear, first-in/first-out. Replaces newest error with: <code>-350 , Queue overflow</code>
Viewing Entries	Press: <b>System, Show Errors, Status</b>	Press: <b>System, Show Errors, History</b>	Send SCPI query to the desired interface. <code>SYSTem:ERRor?</code>
Clearing the Queue	Press: <b>System, Show Errors, Clear Error Queue</b> Clears the errors in all the queues.	Press: <b>System, Show Errors, Clear Error Queue</b> Clears the errors in all the queues.	Send <code>*CLS</code> command to the desired interface. Clears errors in the queue for this particular interface only.

Table 1-3 Summary of Event Reporting Modes

Event Type	SCPI Error Queues	Front Panel History Queue	Status Panel Display
Error Event	Logged	Logged	Displayed in Message Line
Warning Event	Logged	Logged	Displayed in Message Line
Advisory Event	Logged	Logged	Displayed in Message Line
Error Condition Detected	Logged	Logged	Displayed in Status Line
Error Condition Cleared	Logged		
Warning Condition Detected	Logged	Logged	Displayed in Status Line
Warning Condition Cleared	Logged		
Grayout Advisory (Benign)	Not logged	Logged	Displayed in Message Line

Table 1-3 Summary of Event Reporting Modes

Event Type	SCPI Error Queues	Front Panel History Queue	Status Panel Display
Grayout Advisory (Forced)	See note <sup>a</sup>	Logged	Displayed in Message Line

a. Not logged, unless the cause of the Advisory was remotely generated, in which case a Warning message, type -221, is logged.

Introduction  
Event Queues

## 2 Instrument Messages

This chapter includes the following sections:

- “Advisory Messages” on page 28
- “Event Messages” on page 32
- “Condition Messages” on page 56

## Advisory Messages

An advisory is simply a message that lets you know something useful; for example “File saved successfully” or “Measuring fundamental.” Operation completion and running status indications are common types of advisories. Advisories have no number and are not logged in the error queue.

Advisories include gray-out “settings conflict” errors. These gray-outs are benign (that is, changing them has no impact on the current measurement).

Advisories are event-type errors only. They are never conditions.

Message	Description/Correction Information
All Auto/Man functions have been set to Auto	Message generated by pressing the Auto Couple front-panel key
Allowable Center Frequency exceeded for the current span	When rotating the knob or step up/down keys to change the Center frequency, the value of the Span is kept constant. Therefore, the center frequency is limited by the frequency range of the instrument
Allowable Span exceeded for the current center frequency	When rotating the knob or step up/down keys to change the Span, the value of the Center frequency is kept constant. Therefore, the span is limited by the frequency range of the instrument
Allowable Start Frequency exceeded for the current span	When rotating the knob or step up/down keys to change the Start frequency, the value of the Span is kept constant. Therefore, the start frequency is limited by the frequency range of the instrument
Allowable Stop frequency exceeded for the current span	When rotating the knob or step up/down keys to change the Stop frequency, the value of the Span is kept constant. Therefore, the stop frequency is limited by the frequency range of the instrument
Already in Single, press Restart to initiate a new sweep or sequence	The instrument is already in the single state. If you want to start a new sweep or sequence, press the <b>Restart</b> key instead
Auto sweep time rules do not apply in FFT sweeps	FFT sweeps do not use the auto sweep time rules, so the rules setting cannot be changed from the front panel. The setting can be changed remotely and it will have no effect on the current operation unless the analyzer is switched out of FFT sweeps
Band Adjust has no effect on a Fixed marker	If a Marker is a Fixed type marker, the marker's value does not change from when it first became fixed. So you cannot change the band of a fixed marker
Band Adjust has no effect with Mkr Function Off	If Marker Function is off, changing the band has no effect
Band-pass filter set to OFF	Turning on any high-pass or low-pass filter turns off band pass filters
Cal Cancelled; Calibration data cleared	User has canceled the cal either directly or indirectly by changing the setup parameters. The current cal data has been erased. Perform a new user cal to obtain calibrated results again
Cal Invalid: meas freq pt(s) > 3.6GHz are > 50MHz from existing Cal pts	When freq points being measured are above 3.6 GHz and a calibration has been successfully performed, and the number of points are changed, the new points are required to be within 50 MHz of the current cal points or the preselector optimize frequencies become inaccurate and the whole cal needs to be invalidated. Interpolation of the cal can only be performed if the new freq points are within 50 MHz of the cal points. To overcome this problem, change the number of freq points back to match cal points or perform another user cal
Carrier power is too low for optimum dynamic range.	For better dynamic range, transmit band spur measurements require >10 dBm signal power at the RF input port
Connecting to source...	The External Signal Generator is being interrogated via SCPI, to see whether it is suitable for the instrument to control. Please wait until complete before pressing any buttons
Demod Time is not available in Zero Span	The Demod Time function is not available in zero span because in zero span we are <b>always</b> demodulating

Message	Description/Correction Information
Detector <X> changed due to physical constraints	You have selected more detectors than the instrument hardware can implement. An existing detector selection has been changed to allow the current detector choice to be selected. <X> indicates the trace number for which the detector was changed
Dynamic range is not optimum. Set AUTO RF input.	
Exp. Averaging not available when AUTO PhNoise is active.	
FFT Width is not settable unless Sweep Type is set to FFT	You must select the FFT sweep type before you can set the FFT Width
File <filename> saved	The file save operation executed successfully
Filter BW function is only available for Gaussian filter type	Flattop and CISPR/MIL filters have defined shapes that cannot be altered. Only the Gaussian filter type allows filter bandwidth definition changes
Fixed LO freq should be greater than RF Stop freq	The setup frequencies break the rules for a downconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The LO fixed freq should be greater than the RF freq's for an LSB or DSB (for DSB measurements the setup uses LSB values) downconverter setup. Use the graph icon on the DUT setup form to clarify the setup required
Freq Scale Type=Log is not available in Zero Span	Logarithmic scaling cannot be used for time domain sweeps (0 Hz span)
Frequency Hopping enabled, waiting for valid burst	The demodulated burst type has not been found in the originally demodulated slot location within the frame
Frequency menu has changed to reflect frequency context switch	The frequency context parameter has been changed either by the user or the system. The frequency menu will now contain the frequencies for the new context. No action required
Gate required for valid results	
High-pass and Low-pass filters set to OFF	Turning on any band pass filter will turn off high-pass and low-pass filters
High-pass filter set to OFF	Turning on any band pass filter will turn off high-pass filters
IF Fixed freq should be greater than LO Stop freq	The setup frequencies break the rules for an upconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The IF fixed freq should be greater than the LO Stop freq for a USB upconverter swept LO setup. Use the graph icon on the DUT setup form to clarify the setup required
IF Fixed freq should be greater than RF Stop freq	The setup frequencies break the rules for an upconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The IF fixed freq should be greater than the RF Stop freq for an upconverter swept LO setup. Use the graph icon on the DUT setup form to clarify the setup required
IF Start freq should be greater than LO Fixed freq	The setup frequencies break the rules for an upconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The IF start freq should be greater than the LO fixed freq for an USB upconverter fixed LO setup. Use the graph icon on the DUT setup form to clarify the setup required
IF Start freq should be greater than RF Start freq	The setup frequencies break the rules for an upconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The IF start freq should be greater than the RF Start freq for an upconverter fixed LO setup. Use the graph icon on the DUT setup form to clarify the setup required

## Instrument Messages

### Advisory Messages

Message	Description/Correction Information
Input is internal	The instrument's input is set to internal (the internal amplitude reference signal). So any signals connected to the front/rear panel inputs cannot be measured
LO Fixed freq should be greater than IF Stop freq	The setup frequencies break the rules for an upconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The LO fixed freq should be greater than the IF Stop freq for an LSB upconverter fixed LO setup. Use the graph icon on the DUT setup form to clarify the setup required
LO Fixed freq should be greater than RF Stop freq	The setup frequencies break the rules for a downconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The LO fixed freq should be greater than the RF Stop freq's for an LSB or DSB (for DSB measurements the setup uses LSB values) downconverter fixed LO setup. Use the graph icon on the DUT setup form to clarify the setup required
LO Start freq should be greater than IF Fixed freq	The setup frequencies break the rules for an upconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The LO Start freq should be greater than the IF fixed freq for an LSB upconverter swept LO setup. Use the graph icon on the DUT setup form to clarify the setup required
LO Start freq should be greater than RF Start freq	The setup frequencies break the rules for a downconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The LO start freq should be greater than the RF Start freq's for an LSB downconverter swept LO setup. Use the graph icon on the DUT setup form to clarify the setup required
LO Stop freq should be greater than RF Stop freq	The setup frequencies break the rules for a downconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The LO Stop freq should be greater than the RF Stop freq's for a DSB (for DSB measurements the setup uses LSB values) downconverter swept LO setup. Use the graph icon on the DUT setup form to clarify the setup required
Low-pass filter set to OFF	Turning on any band pass filter will turn off low-pass filters
No spurs have been found	You started a measurement in examine meas type in single or continual sweep mode, or full meas type in single sweep mode, but no spurs were found
Preparing Calculation...	
Preselector is centered	The preselector has been successfully centered
Preselector not used in this frequency range.	You cannot center or adjust the preselector because it is not used at all at the current marker frequency or between the current start and stop frequencies
Probe connected, cal data is being reapplied; <port>; <probe>	A probe has been connected, calibration data is being reapplied
Probe connected, no probe cal; using cable cal data; <port>; <probe>	A probe has been connected and no probe calibration data is available. The latest cable calibration data will be used
Probe disconnected, reverting to cable calibration data; <port>	A probe has been disconnected, calibration data reverting to the last cable calibration data
Reading SNS data...	The Keysight Smart Noise Source has been connected and the application is reading the device EEPROM data. Please wait until complete before continuing
Recalled File <filename>	A file recall (open/load) was successfully completed
Refer to online help for assistance with DSB measurements	The Double Side Band measurement requires careful setup to obtain valid results. Please refer to the manuals for help with this setup
Requested timeslot number is not present.	The selected timeslot is not on. (Timeslot is referenced to the trigger point)

Message	Description/Correction Information
RF Start freq should be greater than IF Fixed freq	The setup frequencies break the rules for a downconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The RF Start freq should be greater than the IF Fixed freq for a DSB (for DSB measurements the setup uses LSB values) downconverter swept LO setup. Use the graph icon on the DUT setup form to clarify the setup required
RF Start freq should be greater than IF start freq	The setup frequencies break the rules for a downconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The RF start freq should be greater than the IF Start freq's for an LSB downconverter fixed LO setup. Use the graph icon on the DUT setup form to clarify the setup required
RF Start freq should be greater than LO fixed freq	The setup frequencies break the rules for a downconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The RF start freq should be greater than the LO fixed freq's for an USB downconverter fixed LO setup. Use the graph icon on the DUT setup form to clarify the setup required
RF Start freq should be greater than LO Start freq	The setup frequencies break the rules for a downconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The RF start freq should be greater than the LO Start freq's for an USB downconverter swept LO setup. Use the graph icon on the DUT setup form to clarify the setup required
RF Stop freq should be greater than IF Stop freq	The setup frequencies break the rules for a downconverter measurement. The measurement will still run, but check setup frequencies are correct before continuing. The RF Stop freq should be greater than the IF Stop freq's for an USB or DSB (for DSB measurements the setup uses LSB values) downconverter fixed LO setup. Use the graph icon on the DUT setup form to clarify the setup required
Scale/Div only applies in Log Y Scale	Setting the Scale/Division only makes sense when you are using a logarithmic Y scale
Signal Track is turned off when Zero Span is selected	Signal Track is not available when you have selected Zero Span. So if Zero Span is entered while in Signal Track is On, Signal Track is turned off
Signals deleted	The signals in the signal list were successfully deleted
Sweep Points/Span is < minimum. Results may be inaccurate.	The sweep point to span ratio is below the minimum required to ensure the bucket ratio is large enough to test DVB-T masks
Sweep Setup is not available in Zero Span	Zero span is a display at a single frequency, so there is no "sweeping" to set up
Sync is RF Ampl (not Training Sequence). Bits are not accurate.	
Trace file saved.	The trace saving operation was successful
Use Gate View Sweep Time in the Gate menu.	When in Gate View you use Gate View Sweep Time, rather than Sweep Time, to control the Gate View window
User Cal valid. Apply Cal from Meas Setup menu	The measurement setup has changed such that the current cal data can be applied to the results. To apply the cal, press Meas Setup/Cal Setup/Apply Calibration. A new cal can be performed if required

Instrument Messages

Event Messages

## Event Messages

Event messages are displayed in the `MSG` area in the bottom left of the instrument display. Event messages and message numbers are defined by the SCPI standard.

In X-Series, sub-messages are often attached to add additional information, to help you better understand the event being reported. For example, error `-221` is defined as `Settings Conflict`, but in X-Series you will often see a longer message appended to error `-221`, such as `Settings Conflict; Function not available in Zero Span`. This helps you understand the exact cause of the Settings Conflict error.

## -800, Operation Complete Event

Err#	Message	Verbose/Correction Information
-800	Operation complete	The instrument has completed all selected pending operations in accordance with the IEEE 488.2, 12.5.2 synchronization protocol
-800	Operation complete; Loaded <ARB filename> successfully, but no license <required licenses> installed	This is a warning, and is GUI-only, that is, this warning cannot be queried by SCPI. It indicates that the ARB is successfully loaded into ARB memory, but requires licenses that are not present on the instrument.  To license the ARB, install the required license(s) according to <required licenses> string, or multi-pack license it.

## -700, Request Control Event

Err#	Message	Verbose/Correction Information
-700	Request control	The instrument requested to become the active IEEE 4881 controller-in-charge

## -600, User Request Event

Err#	Message	Verbose/Correction Information
-600	User request	The instrument has detected the activation of a user request local control

## -500, Power on Event

Err#	Message	Verbose/Correction Information
-500	Power on	The instrument has detected an off to on transition in its power supply

## -400 to -499, Query Errors

Err#	Message	Verbose/Correction Information
-400	Query Error	There was a problem with a query command. The exact problem cannot be specifically identified
-410	Query INTERRUPTED	Some condition caused an INTERRUPTED query to occur. For example, a query was followed by DAB or GET before a response was completely sent
-420	Query UNTERMINATED	Some condition caused an UNTERMINATED query to occur. For example, the device was addressed to talk and an incomplete program message was received
-430	Query DEADLOCKED	Some condition caused a DEADLOCKED query to occur. For example, both the input buffer and the output buffer are full and the analyzer cannot continue. The analyzer automatically discards output to correct the deadlock
-440	Query UNTERMINATED after indefinite response	A query was received in the same program message after a query requesting an indefinite response was executed

## -300 to -399, Device-Specific Errors

Err#	Message	Verbose/Correction Information
-300	Device-specific error	An instrument error occurred and the exact problem cannot be specifically identified. Report this error to the nearest Keysight Technologies sales or service office
-310	System error;	An internal system-type error has occurred. The exact problem cannot be specifically identified. Report this error to the nearest Keysight Technologies sales or service office
-310	System error; A license will soon expire;<feature code> will expire in <time>	The indicated feature/software will expire in the specified time. Contact Keysight Technologies to purchase continued use of this functionality
-310	System Error; enable GPIB controller mode	Press <b>System</b> , <b>I/O Config</b> , <b>GPIB</b> and set GPIB Controller to Enabled so that the analyzer can control the source over GPIB
-310	System error; Error transmitting a LAN event to the network.	Communication with the network driver failed
-310	System error; Failed to initialize the PTP clock to current time.	Failure communicating with the DMC libraries' PTP controller
-310	System error; Failed to instantiate the PTP ordinary clock.	Failure in the starting up the DMC libraries' PTP controller
-310	System error; feature <feature code> not licensed	The specified feature, for example "N9073A-TR2", is not licensed. The license may have expired. You cannot use it until you obtain a license
-310	System error; Feature expired; <feature code>	The specified feature has expired. The license is no longer valid
-310	System error; License installation failed;<feature code>	The license installation of the specified feature, for example "N9073A-TR2", has failed. You should refer to the event log in the control panel for more details
-310	System error; License removal failed; <feature code>	The license removal of the specified feature, for example "N9073A-TR2" has failed. You should refer to the event log in the control panel for more details
-310	System error; No license; <feature code> will terminate in <time>	The specified feature will stop working in the specified time due to the license expiration You will be prompted to save results and exit
-310	System Error; No supported source found	Signal source at given IP address is not responding / IP does not belong to a source. Check IP address and network connection
-310	System Error; source connection lost, check interface connection	Signal source at given IP address is not responding / IP does not belong to a source. Check IP address and network connection
-310	System error; The configured PTP hardware driver could not be instantiated.	The PTP driver failed on initialization
-310	System error; The PTP hardware driver reported a configuration error.	Failure in the execution of the PTP driver. The most likely cause of this error is a mismatch between versions of the PTP driver and the LXI middleware

Err#	Message	Verbose/Correction Information
-310	System error; The PTP ordinary clock reported a configuration error.	Failure in execution of the DMC libraries' PTP controller
-310	System error; The Trigger alarm delayed LAN event was not scheduled due to an existing pending event.	Delayed LAN events cannot occur too close together (within 20 ms)
-310	System error; The Trigger alarm delayed LAN event was not scheduled due to a conflict with an existing scheduled alarm.	Delayed LAN events cannot occur too close to a scheduled Alarm (within 20 ms)
-310	System error; The Trigger alarm was not scheduled due to a conflict with an existing scheduled alarm.	Alarms cannot be scheduled to happen too close together (within 20 ms)
-311	Memory error	There is a physical problem with the instrument memory, such as a parity error
-312	PUD memory lost	Protected user data saved by the *PUD command has been lost
-313	Calibration memory lost	The nonvolatile calibration data used by the *CAL? command has been lost
-314	Save/recall memory lost	The nonvolatile data saved by the *SAV? command has been lost
-315	Configuration memory lost	The nonvolatile configuration data saved by the instrument has been lost
-320	Storage fault;	A problem was found while using data storage. The error is not an indication of physical damage or failure of any mass storage element
-321	Out of memory	An internal operation needed more memory than was available. Report this error to the nearest Keysight Technologies sales or service office
-330	Self-test failed	A self-test failure occurred. Report this error to the nearest Keysight Technologies sales or service office
-340	Calibration failed	The instrument requires an Align All Now. Restore the alignment by pressing <b>System, Alignments, Align All Now</b>
-340	Calibration failed; <failure msg> <port>	The calibration for one of the I-Q ports did not succeed. The information in the "failure msg" field can be used to troubleshoot this problem. Contact Keysight technical support
-350	Queue overflow	An error occurred that did not get put in the error queue because the queue was full
-360	Communication error	There was a problem with instrument remote communications. The exact problem cannot be specifically identified
-360	Communication error; SNS data read failure. Disconnect then reconnect SNS	The Keysight Smart Noise Source connected to the instrument has failed to be read by the application. Please disconnect and reconnect the SNS. If this continues to fail, then the SNS may have had its EEPROM corrupted or another hardware fault exists. Check SNS on another instrument, NFA and ESA are also SNS compatible instruments. Check that the device is not an Keysight power sensor which uses the same cable interface

## Instrument Messages

### Event Messages

Err#	Message	Verbose/Correction Information
-360	Communication error; SNS is not connected	The Keysight Smart Noise Source connected to the instrument has failed to be read by the application. Please disconnect and reconnect the SNS. If this continues to fail, then the SNS may have had its EEPROM corrupted or another hardware fault exists. Check SNS on another instrument, NFA and ESA are also SNS compatible instruments. Check that the device is not an Keysight power sensor which uses the same cable interface
-361	Parity error in program message	A parity bit was not correct when the data was received. For example, on a parallel port
-362	Framing error in program message	A stop bit was not detected when data was received. For example, on a remote bus port
-363	Input buffer overrun	A software or hardware input buffer on a port overflowed with data because of improper or nonexistent pacing
-365	Time out error	There was a time-out problem in the instrument. The exact problem cannot be specifically identified

### -221 Settings Conflict Errors

This is one of the errors in the standard SCPI error range -200 to -299. For all other errors in this range, see “-200 to -299, Execution Errors” on page 45.

Err#	Message	Verbose/Correction Information
-221	De-emphasis only available in FM	The de-emphasis function is only available if FM demod is selected
-221	Function not available in Zero Span	The function you are trying to access is not available in zero span
-221	Setting conflict; <trigger source> trigger is not available while input is <input port>	The trigger source (Video, RF Burst, I/Q Mag, etc.) is not available with the current input port (RF, IQ, etc.)
-221	Setting conflict; Differential setting determined by probe type	A probe is connected that has a built in Differential setting. The setting cannot be changed manually
-221	Setting conflict; Input Z unavailable when probe sensed	A probe is connected and the Input Z is set based on the probe type. It cannot be changed manually
-221	Settings conflict;	A legal command was received but it could not be executed due to the current device state
-221	Settings conflict; *.CSV file format is not available in this measurement.	You cannot load or save base instrument traces, as this is not supported by the Log Plot measurement
-221	Settings conflict; <Q Param> cannot be changed when Q same as I	When the <b>Q Same as I</b> parameter is set to Yes, the I parameter value is copied to <Q Param> and the <Q Param> value cannot be changed. Set <b>Q Same as I</b> to No to enable explicit control of the <Q Param> value
-221	Settings conflict; A Valid User Cal is required. Optimize aborted	Optimize Preselector can only be performed if a valid user cal exists and is applied to current results. Perform a user cal first or apply existing cal

Err#	Message	Verbose/Correction Information
-221	Settings conflict; Auto Tune not available in Tracking Source mode	The Auto Tune feature cannot be used when you are using a Tracking Source
-221	Settings conflict; BTS gain is not available in this Mode	Base Transceiver Station gain correction is not available in some Modes, or in some measurements (for example, the SA measurement)
-221	Settings conflict; Cal only available when Source Mode is Tracking	You must be in Tracking Source mode to use the Cal functions under Normalize. Press Source, Source Mode and set it to Tracking
-221	Settings conflict; Calibration cannot be performed without valid ENR data	The cal ENR table has no values in it, and hence the cal cannot be performed. Correct by either populating the cal ENR table, set ENR mode to Spot, or set the 'Use Meas Table Data for Cal' to 'On'
-221	Settings conflict; Cancellation is not available while measuring DANL floor.	Phase Noise cancellation does not make sense when measuring the DANL Floor, so for this reason it has been disabled
-221	Settings conflict; Cancellation Ref trace has no data.	When performing phase noise cancellation, you need to supply a reference trace that will be used to cancel out the background noise of the analyzer. The reference trace must be in Reference (View) mode, and selected by the Ref Trace parameter under the Cancellation menu
-221	Settings Conflict; Cancellation trace has different X-Scale	Reference trace for the cancellation has a different range of X-axis against the target trace
-221	Settings conflict; Cannot optimize while user cal in progress	Optimize Preselector cannot be performed while a user cal is in progress. The user cal performs an optimize preselector prior to taking the noise source on/off level results for the cal data
-221	Settings conflict; Can't Auto-Couple Res BW in Zero Span	The resolution bandwidth cannot be set to auto while you are in zero span (time domain)
-221	Settings conflict; Carrier freq not allowed with BMT. (Bottom/Middle/Top only)	The transmit band spur measurement only allows bottom (B), middle (M), and top (T) channel frequencies for each supported frequency band. The carrier frequency must be set to the bottom, middle or top frequency of the current frequency band
-221	Settings Conflict; Code channel duplication	This error is reported when the given code channel overlaps other code channel
-221	Settings conflict; Continuous Peak is not available with Fixed marker	The continuous peak feature cannot be used with a marker that is fixed. By definition that marker value cannot change
-221	Settings conflict; Continuous Peak is not available with Signal Track on	The continuous peak feature cannot be used while you are also using the signal tracking function
-221	Settings conflict; Destination trace for Trace Math cannot be a trace operand	The resulting trace data (from doing a trace math function) cannot be put into the any of the traces that are being used by the math operation

## Instrument Messages

### Event Messages

Err#	Message	Verbose/Correction Information
-221	Settings conflict; Downconv only available when DUT is Amplifier	SCPI only message. The System Downconverter can only be set to 'On' when the DUT type is amplifier. Change DUT type to Amplifier if the System Downconverter is required
-221	Settings conflict; EDGE EVM only supports EDGE TCH burst type.	
-221	Settings conflict; Electronic attenuator is disabled	You are using the mechanical attenuator, and have not enabled the electronic attenuator. You cannot set the value of the electronic attenuator because it automatically sets/changes when enabled
-221	Settings conflict; Electronic attenuator is not available above 3.6 GHz	The maximum frequency of the electronic attenuator is 3.6 GHz. This is because of switching capacitance
-221	Settings conflict; Electronic attenuator unavailable in current state	
-221	Settings conflict; Electronic attenuator unavailable with Preamp on	The internal preamp is on. Electronic attenuator cannot be used while you are using the internal preamp
-221	Settings conflict; EMI Detectors are not available in FFT sweep	QPD, EMI Average, EMI Peak, and MIL Peak are not allowed when in the manually selected FFT sweep mode
-221	Settings conflict; External Mixer not available	A command has been sent to reference the External Mixer in a model that does not contain it
-221	Settings Conflict; FAST method can only be used while Radio Std is W-CDMA	
-221	Settings conflict; Feature not available in this View	Some functionality is available in one View, but not in another. (See the Views under the <b>View/Display</b> key.) This error occurs if you send a SCPI command or push a grayed-out key that is not available in the current selected View
-221	Settings conflict; Feature not supported for selected source	You have selected a feature that the selected source does not support
-221	Settings conflict; Feature not supported for this Input.	Some functionality is not available when certain Inputs are selected. For example, Trigger Holdoff is not available for the BBIQ input
-221	Settings conflict; Feature not supported for this measurement.	Some functionality is available in one measurement, but not in another. (See the measurements under the <b>Meas</b> key.) This error occurs if you send a SCPI command or push a grayed-out key that is not available in the current selected measurement
-221	Settings conflict; Feature not supported for this model number	This functionality is not a part of the instrument you are using, but may be found in other models in the X-Series

Err#	Message	Verbose/Correction Information
-221	Settings conflict; FFT IF Gain High not available when Swept IF Gain = Manual Low	When Swept IF Gain is manually set to Low, you cannot set the FFT IF Gain to High because that would make the Reference Level couplings wrong in FFT mode
-221	Settings conflict; FFT method is unavailable for level gating	If you are using level gating, you cannot select the FFT Gate Method
-221	Settings conflict; FFT sweep type is not available while in Gated LO	The gated LO function turns the LO on and off as it sweeps, so the FFT sweep type is not available if you have selected gated LO
-221	Settings conflict; FFT sweep type is not available while in Gated Video	The FFT sweep type is not available if you have selected the gated video function
-221	Settings conflict; FFT Sweeps unavailable in Tracking Source mode	Since FFTs do not sweep, you cannot use a Tracking Source while doing FFTs
-221	Settings conflict; Fixed marker adjust not available while Marker Function is on	If a Marker Function is on for a Fixed marker, the marker's reported value is derived from the function. Therefore, you cannot directly set the X or Y value of a Fixed marker that has a marker function turned on
-221	Settings conflict; Fixed Marker Y value is not adjustable with Normalize On	If Normalize is on the Amplitude scale is in dB units, so adjusting the Y value of a Fixed marker is not possible
-221	Settings conflict; Freq > 3.6 GHz unavailable while electronic attenuator enabled	The electronic attenuator does not function above 3.6 GHz, so if you have that attenuator enabled, you cannot change the center frequency so that frequencies above 3.6 GHz are displayed/measured
-221	Settings conflict; Function not available in External Mixing	The frequency offset feature cannot be used when you have selected a log scale for the frequency axis
-221	Settings conflict; Function not available in Tracking Source mode	The feature cannot be used when you are using a Tracking Source
-221	Settings conflict; Function only available in Tracking Source mode	The feature cannot be used unless you are using a Tracking Source
-221	Settings conflict; Function unavailable with MW Presel off	You cannot center or adjust the preselector because the Microwave Preselector is currently off
-221	Settings conflict; Gate control is Edge for Gated FFT	You cannot use level triggering to control the gate if you are using the FFT gating method
-221	Settings conflict; Gate control must be Edge for this Gate Source	You cannot use level triggering to control the gate when you are using the currently selected gate source

## Instrument Messages

### Event Messages

Err#	Message	Verbose/Correction Information
-221	Settings conflict; Gate is not available when Marker Count on	The gate function cannot be used while you have marker count turned on
-221	Settings conflict; Gate Length is not settable in FFT sweeps	The sweep time for FFT sweeps is set by the calculations, so sweep time settings cannot be adjusted
-221	Settings conflict; Gate Length is not settable in FFT sweeps	The sweep time for FFT sweeps is set by the calculations, so sweep time settings cannot be adjusted
-221	Settings conflict; Gate Method is not compatible with current Sweep Type setting	If the Gate is On and you have the FFT Sweep Type manually selected, then the Gate Method cannot be selected
-221	Settings conflict; Gate not available with external Tracking Source	The Gate functions are unavailable when Source Mode is Tracking with an external source. This is because the Gate circuitry is used to sync the external source
-221	Settings conflict; Gate not available with Tracking Generator	If the Source Type is Tracking Generator, the Gate circuitry is used for TG sync and is not available for gating
-221	Settings conflict; Gated FFT is not available while Sweep Type is set to Swept	The gated FFT function is not available if you have selected the swept type of sweep. You must be in the FFT sweep type
-221	Settings conflict; Gated LO is not available while Sweep Type is set to FFT	The FFT sweep type moves the LO frequency in steps. So the gated LO function is not available if you have selected FFT sweep
-221	Settings conflict; Gated Video is not available while Sweep Type is set to FFT	The gated video function is not available if you have selected the FFT sweep type
-221	Settings conflict; Incorrect RBW for demod. Change RBW	
-221	Settings conflict; Ind I/Q is not available for this measurement	The Independent I and Q setting is not available for the current measurement. Only some measurements (initially, only VXA) support this setting
-221	Settings conflict; Invalid trace number	The subopcode used to specify the trace number is invalid for this measurement or query
-221	Settings conflict; Knob is not available to modify this function	You should select a specific value for this function. Scrolling through values with the knob is not allowed
-221	Settings conflict; LO Phase Noise Adj not available	For instruments without the Dual-Loop LO, this feature is not available
-221	Settings conflict; Marker 1 Trace Update=off turns off Signal Track	Signal Track not available unless the trace containing Marker 1 is updating

Err#	Message	Verbose/Correction Information
-221	Settings conflict; Marker cannot be relative to itself	A marker must be set relative to another marker, not to itself
-221	Settings conflict; Marker Count is not available when Gate on	The marker count function cannot be used while you have gating turned on
-221	Settings conflict; Marker Function is not available for a Fixed marker	If a Marker is a Fixed type marker, the marker's value does not change from when it first became fixed. You cannot turn on or change a Marker Function because there is no ongoing measurement data to use for the marker function calculation
-221	Settings conflict; Marker type must be delta	Mkr?->Span and Mkr?->CF require that the selected marker be a delta marker
-221	Settings conflict; Marker-> function is not available in zero span	Most of the <b>Marker To</b> functions are not available if you are in zero span (span = 0 Hz, or time domain), so you cannot send the commands for these functions
-221	Settings conflict; Mask unavailable for current Span. Increase to display mask.	The current span setting is either narrower than the mask width or so wide that there are too few display points to allow the mask to be drawn. Increase or decrease the span to display the mask
-221	Settings conflict; Meas Type was changed to Examine for Exp Avg Mode.	Average Mode has been changed to Exponential. Full Meas Type is not available for Exponential Average Mode, therefore Meas Type has been changed to Examine
-221	Settings conflict; Meas Type was changed to Full for Repeat Avg Mode	Average Mode has been changed to Repeat. Examine Meas Type is not available for Repeat Average Mode therefore Meas Type has been changed to Full
-221	Settings Conflict; MinPts/RBW limit not met	
-221	Settings conflict; Mkr -> CF is not available when the x-axis is time domain	The marker to center frequency functionality does not work when the X-axis is in the time domain
-221	Settings conflict; Mod Scheme AutoDet unavailable when Burst Sync=RF Amptd	The modulation scheme auto detection is unavailable when the burst sync is set to RF Amptd (GSM/EDGE)
-221	Settings conflict; MS gain is not available in this Mode	Mobile Station gain correction is not available in some Modes, or in some measurements (for example, the SA measurement)
-221	Settings conflict; Must apply Amplitude Correction to make this unit available	These special units only apply when you are doing antenna measurements, so you must have a correction that includes Antenna Units enabled
-221	Settings conflict; No meas frequencies are above 3.6 GHz	Optimize Preselector can only be performed on frequencies in high band, that is, above 3.6 GHz. The current setup does not have input frequencies (IF) in this range so an Optimize Preselector cannot be performed
-221	Settings conflict; no source selected	You must select a source using Select Source before you can do this

## Instrument Messages

### Event Messages

Err#	Message	Verbose/Correction Information
-221	Settings conflict; Normalize is not available when Scale Type = Lin	Normalize does not support Linear amplitude scale, since the results are always presented as a dB ratio
-221	Settings conflict; Normalize is not available while Demod View is on	The normalization (correction) function cannot be used if you are using the Demod View
-221	Settings conflict; Normalize is not available while Trace Math is on	The Normalize function works by doing trace manipulation, so if trace math is on you cannot turn on normalization
-221	Settings conflict; Only active Antenna Unit available; no other Y axis units	When a correction with antenna units is turned on, the only Y-axis units you can have are those that match the Antenna Unit. Turn off the Correction or the Antenna Unit under Input/Output, Corrections
-221	Settings conflict; Option not available	You have attempted to perform an action for which a required option is not installed
-221	Settings conflict; Param only available when DUT is a freq converter	SCPI only message. The sideband and freq context parameters are only available when a freq conversion setup is in use. Change setup to contain a freq conversion to use these parameters
-221	Settings conflict; Param only available when External LO Mode is Swept	SCPI only message. This parameter is only available when the LO mode is set to Swept. Change the LO Mode to Swept
-221	Settings conflict; Param only available when External LO Mode is Fixed	SCPI only message. This parameter is only available when the LO mode is set to Fixed. Change the Freq Mode to Fixed
-221	Settings conflict; Param only available when Frequency Mode is Fixed	SCPI only message. This parameter is only available when the Freq mode is set to Fixed. Change the Freq Mode to Fixed
-221	Settings conflict; Param only available when Frequency Mode is Swept	SCPI only message. This parameter is only available when the Freq mode is set to Swept. Change the Freq Mode to Swept
-221	Settings conflict; Param only available when valid cal data exists	SCPI only message. The 'Apply Calibration' parameter is only available when the stored cal data matches the current setup. Perform a fresh 'Calibrate Now' or change setup such that current cal data is valid
-221	Settings conflict; Preamp gain is not available in this Mode	Preamp gain correction is not available in some Modes or Measurements
-221	Settings conflict; Preamp unavailable with electronic attenuator on	The electronic attenuator is on. Internal preamp cannot be used while you are using the electronic attenuator
-221	Settings conflict; Reference marker must be in same window	A delta marker and its reference must be in the same window. This error occurs when you try to turn on a delta marker for which the reference is in a different window

Err#	Message	Verbose/Correction Information
-221	Settings conflict; Relative Trigger needs hardware support for this meas	To do Relative Triggering in this measurement requires optional hardware that is not present in this analyzer
-221	Settings conflict; Scale Type = Lin is not available when Normalize is on	Only the Log amplitude scale is available in Normalize, since the results are always presented as a dB ratio
-221	Settings conflict; Settings conflict; Pre-trigger is insufficient for demod. Decrease Trig Delay.	
-221	Settings conflict; Signal Track is not available with Continuous Peak	The signal tracking feature cannot be used while you are also using the continuous peak function
-221	Settings conflict; Signal Track is only available in Swept SA measurement	The signal track functionality can be used when making a swept SA measurement. It is not available in the SA measurement when you are using FFT sweeps
-221	Settings conflict; Signal Track is turned off when Zero Span is selected	Signal Track is not available when you have selected Zero Span. So if Zero Span is entered while in Signal Track is On, Signal Track is turned off
-221	Settings Conflict; Span limited to XXX	
-221	Settings conflict; Span Zoom is not available in Zero Span	Span Zoom does not work with a time domain X-axis. You must select a span greater than 0 Hz
-221	Settings conflict; Step keys are not available to modify this function	You should select a specific value for this function. Using the <b>Up/Down</b> step keys to scroll through values is not allowed
-221	Settings conflict; Sweep Setup only available in swept measurements	The current measurement uses FFT mode, so does not use the Sweep Setup menu
-221	Settings conflict; Sweep Time cannot be auto-coupled in FFT sweeps	The sweep time for FFT sweeps is set by the calculations. So sweep time settings cannot be adjusted
-221	Settings conflict; Sweep Time cannot be auto-coupled while in Zero Span	You cannot send the remote command to set the sweep time to auto while you are in zero span
-221	Settings conflict; Sweep Time cannot be set while in FFT sweeps	The sweep time for FFT sweeps is set by the calculations. It cannot be manually controlled

## Instrument Messages

### Event Messages

Err#	Message	Verbose/Correction Information
-221	Settings conflict; Swept IF Gain High not available when FFT IF Gain = Manual Low	When FFT IF Gain is manually set to Low, you cannot set the Swept IF Gain to High because that would make the Reference Level couplings wrong in swept mode
-221	Settings conflict; Swept LO not available when freq mode is Fixed	SCPI only message. The LO Mode cannot be set to Swept when the freq mode is set to fixed. Change the freq mode away from fixed, or perform the measurement at several fixed frequencies
-221	Settings conflict; Swept Type=Swept is not available while in Gated FFT	If you have selected gated FFT then you are using the FFT sweep type and you cannot select the swept type of sweeping
-221	Settings conflict; System Display Settings, Annotation is Off	This is an override that turns off many of the annotations. This is available as a security feature
-221	Settings conflict; T hot must be greater than T cold	The Tcold value set under <b>Meas Setup, ENR, Tcold</b> needs to be lower than the Thot value currently being set. Tcold is often taken as the ambient temperature of the noise source. If using an SNS the Tcold value may be read automatically before every sweep
-221	Settings Conflict; The parameter cannot be changed in FAST mode	
-221	Settings conflict; Trace Math is not available while Normalize is on	The Normalize function works by doing trace manipulation, so trace math is not available while normalization is running
-221	Settings conflict; Tracking Source unavailable in FFT Sweeps	Since FFTs do not sweep, you cannot use a Tracking Source while doing FFTs
-221	Settings conflict; Trigger input in use for source synchronization	If Point Trigger is being used with an external trigger input to synchronize an external source to the analyzer, that trigger input is unavailable for triggering
-221	Settings conflict; Trigger is not available with span > 0 Hz.	
-221	Settings conflict; Tx Band Spur meas does not support this frequency band.	The transmit band spur measurement does not support all of the commercially available frequency bands. You need to change your selection under <b>Mode Setup, Radio, Band</b> to one of the supported bands
-221	Settings conflict; Tx Band Spur measurement is not defined for mobiles.	Only base station testing is available
-221	Settings conflict; Administrator privileges required	You must be logged in with administrator privileges to do this. Log out and log back in as the Administrator, then restart the SA application
-221	Settings conflict; Auto Scan Time/Meas Time do not apply in Stepped Scan Type.	The Auto Scan Time/Meas Time are not available when Scan Type =Stepped Scan

Err#	Message	Verbose/Correction Information
-221	Settings conflict;Auto Scan Time/Meas Time do not apply in Stepped Scan Type.	The Auto Scan Time/Meas Time are not available when Scan Type =Stepped Scan
-221	Settings conflict;ClearList & Start not available when ScanSeq = (Re)measure	Cannot perform Clear List & Start during (Re)measure, because we require the frequency information of the peaks in signal list to perform (Re)measure
-221	Settings conflict;EMI Detectors and Average detector can't be used together	You cannot turn on any EMI Detector and Average detector together. They are always mutually exclusive
-221	Settings conflict;Freq > 1 GHz is not available while RF Input 2 enabled	Frequency is limited to 1GHz while RF Input 2 is enabled
-221	Settings conflict;Function not available while measurement is running	Settings change is not allowed while measurement is running. You must stop the current measurement if you wish to change the settings
-221	Settings conflict;function unavailable with this EMC Standard	
-221	Settings conflict;Log Percent Auto Step Rule does not apply in Swept Scan Type.	The Log Percent rule is not available when Scan Type=Swept Scan because we are always doing linear sweep
-221	Settings conflict;QPD + EMI Average + RMS Average is not allowed	You cannot turn on all 3 EMI detectors together. You must turn off one of the EMI Detectors before you turn this on
-221	Settings conflict;Range <0> is turned off as total range points > 40001	Max of Total range points is 400000. Reduce Scan Points or increase Step Size in order to turn on that range
-221	Settings conflict;RF Input 2 is not available above 1GHz	If the frequency range is set above 1GHz, you cannot change to RF Input 2
-221	Settings conflict;Scan Time & Points do not apply in current Step/Time Control.	The Scan Time & Points are not available when Step/Time Control is set to Step & Dwell
-221	Settings conflict;Step Size & Meas Time do not apply in current Step/Time Control.	The Step Size & Meas Time are not available when Step/Time Control is set to Scan Time&Pts

## -200 to -299, Execution Errors

This section lists all messages in the range except -221 error messages. For details of -221 messages, see [“-221 Settings Conflict Errors” on page 36](#).

## Instrument Messages

### Event Messages

Note that Execution Errors are divided into subclasses, as follows:

- 21x Trigger errors
- 22x Parameter error
- 23x Data corrupt or stale (invalid data)
- 24x Hardware error
- 25x Mass storage error
- 26x Expression data error
- 27x Macro error
- 28x Program error (a downloaded program-related execution error)
- 29x Memory use error

Err#	Message	Verbose/Correction Information
-200	All ranges are off. Turn on at least a range	There are no range turn on in scan table. You need to turn on at least a range to initiate a scan
-200	At Full Zoom	Marker Zoom is not available as it has reached full zoom
-200	At Full Zoom	Marker Zoom is not available as it has reached full zoom
-200	Execution Error	A program execution error has occurred. The exact problem cannot be specifically identified
-200	Execution error; Carrier frequency outside device's transmit band	The entered channel/carrier frequency is not within the range of your current mode setup selection of standard and device
-200	Execution error; Invalid GSM burst timing	A GSM-like burst was acquired, but its timing is not valid. Ensure the correct Burst Type has been selected
-200	Execution error; Invalid IP address	The IP address supplied is either not valid or does not belong to a compatible Signal Generator. Please check the IP address and instrument connection and try again
-200	Execution error; Invalid Marker Trace.	Cannot place markers on the reference trace, because the reference trace is currently turned off or has no data
-200	Execution Error; No peak found.	No signal peak was found within the defined parameters of the search. (Note: for ESA/PSA compatibility, the Swept SA measurement uses 780 for this error number; all other measurements use -220)
-200	Execution error; No ranges are defined. Activate a range.	There are no active ranges in the range table. You will need to activate at least one range
-200	Execution Error; Preselector centering failed	Algorithm failed to center the preselector. This maybe caused by the signal peak being too low in amplitude, or it could be due to excessive CW input signal, alignment error, or hardware failure
-200	Execution Error; Signal not stable enough to track	The signal that you have selected to track is changing too much for the function to track it properly
-200	Execution Error; Store ref trace before turning on Normalize	The Reference trace data must be stored in the Ref trace before you turn on the Normalization function

Err#	Message	Verbose/Correction Information
-200	Execution error; Sync word was not found.	NADC & PDC: In an EVM measurement, the sync word is not found and the synchronization cannot be established when Sync Word is selected in the Burst Sync menu.  Flexible Digital Demodulation: The sync word cannot be detected because of inappropriate parameter settings or incorrect signal
-200	Execution error; Trace file contains no compatible traces.	The trace file may have been created by another version of the Phase Noise personality, which uses a different trace format that is incompatible with the version you are running. Please check that you are running the most up-to-date version of the personality
-200	Execution error; Trace file created by incompatible version of Phase Noise App	The trace file may have been created by another version of the Phase Noise personality, which uses a different trace format that is incompatible with the version you are running. Please check that you are running the most up-to-date version of the personality
-200	Function not available before Marker Zoom is performed	Function not available before perform Marker Zoom
-200	Must perform Scan before do Search	Cannot perform Search as the trace data is empty
-200	No marked signal	Cannot perform the selected function because no signal was marked. You must mark the peak of interest before selecting the function
-200	No Measure At Marker Added to Signal List	No signal peak was added into Signal List as there is no valid measure to Marker result. You must perform Measure at Marker before selecting Measure At Marker --> List
-200	No Peak Added to Signal List	No signal peak was added from the Search to Signal List as no signal peaks were found within the defined parameters of the search criteria
-200	Signal List is Empty	Cannot perform the selected function because the signal list contains no data
-200	Signal List is Full	Cannot perform the selected function because the signal list is full. Please clear the list
-200	Signal Selected is not in the Signal List	The signal selected is not the list. You only can perform the operation on signal that is already available in the list
-201	Invalid while in local	The command cannot be executed while the instrument in Local control
-202	Settings lost due to rtl	A "return to local" control was forced and some settings were lost as a result of this
-203	Command protected	The command could not be executed because it is disabled. It was disabled by licensing or password protection
-203	Command protected; feature not licensed	The specified feature, for example "N9073A-TR2" is not licensed. The license may have expired. You cannot use it until you obtain a license
-210	Trigger error	A trigger error has occurred, but the exact problem cannot be specifically identified
-211	Trigger ignored	A GET, *TRG or other triggering signal was received, but was ignored because of timing considerations. For example, maybe the instrument was not ready to respond when the command was received
-212	Arm ignored	An arming signal was received, but it was ignored
-213	Init ignored	An initiate trigger/sweep request was received and ignored, because another measurement was already in progress
-214	Trigger deadlock	The trigger source for the initiation of a measurement is set to GET, and the following measurement query was received. The measurement cannot be started until a GET is received, but the GET would cause an INTERRUPTED error

## Instrument Messages

### Event Messages

Err#	Message	Verbose/Correction Information
-215	Arm deadlock	The arm source for the initiation of a measurement is set to GET and the following measurement query is received. The measurement cannot be started until a GET is received and the GET would cause an INTERRUPTED error
-220	Parameter error	A problem was found with a program data element. The exact problem cannot be specifically identified
-221	Settings conflict;	There are many types of settings conflict errors. For full details, see “-221 Settings Conflict Errors” on page 36
-222	Data out of range;	A data element was found but the instrument could not be set to that value because it was outside the range defined for the command. A descriptive message may be appended, such as “clipped to upper limit”
-222	Data out of Range; clipped to source max/min	A source parameter has been entered that exceeds the range of the selected source. The parameter has been clipped to match the range of the source
-222	Data out of range; Invalid list data	You tried to use a trace that has a number of sweep points that differs from the current sweep points setting
-222	Data out of range; Two entries already exist at this x-axis value.	When entering values for limit lines, you cannot have more than two Y-axis (amplitude) values entered for a specific X-axis (frequency) value
-223	Too much data	A data element (of block, expression, array type, or string type) had more data then allowed by the command, or by the available memory
-223	Too much data; 200 spurs found. Additional spurs ignored.	There are too many spurs for the table (the limit is 200), and any additional spurs that are found will be ignored
-224	Illegal parameter value	An exact data value (from a list of the allowed values) was required, but not found. See the specific feature description for information about the expected parameter values
-224	Illegal parameter value; <Value> invalid. Fractional values are not allowed.	The seconds parameter of an LXI time may not contain a fractional portion. For example 123456789.0 is valid, but 123456789.1 is not valid
-224	Illegal parameter value; <value> out of range.	The value does not fall within the valid range
-224	Illegal parameter value; Exceeding the max list length	The list parameters have a maximum allowed length. You are trying to set a length longer than the maximum
-224	Illegal parameter value; Gated FFT is not available while Sweep Type is set to Swept	The gated FFT function is not available if you have selected the swept type of sweep. You must select the FFT sweep type
-224	Illegal parameter value; Gated LO is not available while Sweep Type is set to FFT	The FFT sweep type moves the LO frequency in steps, so the gated LO function is not available if you have selected FFT sweep
-224	Illegal parameter value; Gated Video is not available while Sweep Type is set to FFT	The gated video function is not available if you have selected the FFT sweep type

Err#	Message	Verbose/Correction Information
-224	Illegal parameter value; Illegal identifier <identifier>. This value may already be in use.	The value for the LXI LAN identifier parameter must be unique (that is, LAN0 and LAN7 must have different identifier strings)
-224	Illegal parameter value; Index out of range	When querying the LXI Event Log or the Servo Log, an index may be used to look at a specific entry. This error occurs if the index provided does not point to a valid entry
-224	Illegal parameter value; Invalid list length	You are trying to set some list measurement settings, but the multiple lists that you sent had differing lengths. The number of settings must be consistent from list to list
-224	Illegal parameter value; LXI Event <event> already exists.	This error occurs when you try to add an LXI Event that has already been added
-224	Illegal parameter value; LXI Event <event> contains illegal characters.	When a new LXI Event is created, it may not use the comma, semicolon, or newline characters. All other printable ASCII characters are valid
-224	Illegal parameter value; LXI Event <event> does not exist.	The requested event has not been added yet
-224	Illegal parameter value; Measurement not available	You tried to turn on a measurement that is not available in the current mode
-224	Illegal parameter value;This instrument is always DC coupled	You cannot set AC coupling in this instrument
-224	Illegal parameter value;This model is always AC coupled	You cannot set DC coupling in this analyzer
-225	Out of memory	There is not enough memory to perform the requested operation
-225	Out of memory; Insufficient resources to load Mode <mode name>	If you attempt to load a mode via SCPI that will exceed memory capacity, the Mode does not load and this message is returned. "mode name" is the SCPI parameter for the Mode in question (for example, SA for Spectrum Analyzer Mode.) You can free up resources using the <b>System, Power On, Configure Applications</b> menu
-225	Out of memory; Memory limit caused Data Acquisition to be truncated	
-226	List not same length	You are using the LIST structure, but have individual lists of differing lengths
-230	Data corrupt or stale;	A legal data element was found, but it could not be used because the data format or the data structure was not correct. This could occur if a new measurement had been started but had not completed
-230	Data corrupt or stale; Measurement data is not available	Measurement data not available. The measurement that you are trying to get data from must be the current active measurement. Maybe you have not initiated the measurement, or it has not completed all the sweeps/averages needed
-230	Data corrupt or stale; Trace contains no data.	Trace cannot be displayed because currently there is no data assigned to it. Use the functions under the <b>Trace/Detector</b> menu, or load a previously saved trace, to assign data to the trace
-230	Data corrupt or stale; Unable to load state from file	There is something wrong with the state data in the desired file. Maybe the file is corrupt, or it is from an instrument/version that is not recognized by the current instrument

## Instrument Messages

### Event Messages

Err#	Message	Verbose/Correction Information
-231	Data questionable	Indicates that the measurement accuracy is suspect
-232	Invalid format	A data element was found but it could not be used because the data format or the data structure was not correct
-232	Invalid format; Map information not loaded	Instrument failed to load the burst mapping information from the selected file
-233	Invalid version	A legal data element was found but could not be used because the version of the data is incorrect. For example, state data changes as new instrument features are added, so old state files may not work in an instrument with a newer version of software
-240	Hardware error	A legal program command or query could not be executed because of a hardware error. The exact problem cannot be specifically identified
-240	Hardware error; See details in Windows Event Log under SA	The internal data acquisition system detected a problem at startup and logged the details in the Windows Event Log
-241	Hardware missing	The operation could not be performed because of missing hardware; perhaps the optional hardware is not installed
-241	Hardware missing; Input not available	The hardware required is not part of this model or the option is not installed
-241	Hardware missing; Internal preamp not available at all frequency points	The Internal Preamp is currently turned on, but the measurement is being performed completely or partially outside the range of the preamp. It is recommended that the user turns preamp off to ensure consistent results across the entire measurement
-241	Hardware missing; not available for this model number	The hardware required is not part of this model
-241	Hardware missing; Option not installed	The optional hardware is not installed
-250	Mass storage error;	A problem was found with the mass storage device (memory, disk drive, etc.). The exact problem cannot be specifically identified
-250	Mass storage error; Access denied	Access is denied
-250	Mass storage error; Bad path name	The specified path is invalid
-250	Mass storage error; Can only import single trace .csv files	Trace files containing multiple traces can not be imported. However, if you need to recall multiple traces you can use the <b>Save</b> and <b>Recall</b> functions, rather than the Import and Export functions
-250	Mass storage error; Can only load an Antenna Unit into Correction 1	The only Correction register that supports Antenna Units is number 1. You have attempted to load an Ampcor file that contains antenna units into another register
-250	Mass storage error; Cannot make	The directory or file cannot be created
-250	Mass storage error; Different Antenna Unit already in use	Attempt to import Corrections file with Antenna Unit that differs from an in-use correction
-250	Mass storage error; Directory not found	The system cannot find the path specified

Err#	Message	Verbose/Correction Information
-250	Mass storage error; Failed to Load trace. Bad file format.	The load trace operation could not be completed, as the input file was not in the expected format. You can only load traces that were previously saved using the <b>Save, Trace</b> feature
-250	Mass storage error; File <filename> wrong type	Attempt to import a data file that is not the proper type for this operation
-250	Mass storage error; File <filename> and instrument version mismatch	While opening a file, there was a mismatch between file version or model number with instrument version or model number. The import still tried to load as much as possible, but you should check it closely
-250	Mass storage error; File contains incorrect data for this operation	There is a mismatch between the file data type of the file specified and the destination indicated. For example, a correction set cannot be loaded/imported into a limit line
-250	Mass storage error; File empty	Cannot save trace because it contains no data. Check that the trace is turned on and contains some valid data
-250	Mass storage error; Invalid register number for *SAV or *RCL Mass Storage error	You have used the *SAV command to save a state to a non existent state register. Or You have used the *RCL command to recall a state register that wasn't previously saved with the *SAV command
-250	Mass storage error; Lock violation	The process cannot access the file because another process has locked a portion of the file
-250	Mass storage error; Mkr Table must be on to save Mkr Table as Meas Results	You have to have a Marker Table on the screen before you can save it. Turn on the Marker Table and try again
-250	Mass storage error; No file names available	Attempt to use the auto file name generation when all 10,000 file names are taken
-250	Mass storage error; Open failed	The system cannot open the device or file specified. This could be because the storage media is full, or possibly due to a filename error. If using an external storage device, check that the device is properly formatted
-250	Mass storage error; Pk Table must be on to save Pk Table as Meas Results	You must have a Peak Table on the screen before you can save it. Turn on the Peak Table and try again
-250	Mass storage error; Read fault	The system cannot read from the specified device
-250	Mass storage error; Register <number> empty	Attempt to recall a register with nothing in it
-250	Mass storage error; Sharing violation	The process cannot access the file because it is being used by another process
-250	Mass storage error; Spectrogram must be on to save as Meas Results	You must have a Spectrogram on the screen before you can save it. Turn on the Spectrogram and try again
-250	Mass storage error; Too many open files	The system cannot open the file
-250	Mass storage error; Write fault	The system cannot write to the specified device
-252	Missing media	A legal command or query could not be executed because of missing media

## Instrument Messages

### Event Messages

Err#	Message	Verbose/Correction Information
-253	Corrupt media	A removable media was found to be bad or incorrectly formatted. Any existing data on the media may have been lost
-254	Media full	A legal command/query could not be executed because the media was full
-255	Directory full	A legal command or query could not be executed because the media directory was full
-256	File name not found;	A legal command or query could not be executed because the file name was not found in the specified location
-257	File name error;	A legal command or query could not be executed because there was an error with the file name on the device media. For example, maybe you tried to copy to a duplicate file name
-257	File name error; Allowable extension is .csv	You are using the wrong type of file extension for the current data/file type
-257	File name error; Allowable extension is .png	You are using the wrong type of file extension for the current data/file type
-257	File name error; Allowable extension is .state	You are using the wrong type of file extension for the current data/file type
-257	File name error; Invalid file name	The filename, directory name, or volume label syntax is incorrect
-257	File name error; name too long	
-258	Media protected	A legal command or query could not be executed because the media was protected. For example, the write-protect was set
-260	Expression error	An error was found with an expression type of data element. The exact problem cannot be specifically identified
-261	Math error in expression	An expression that has legal syntax could not be executed because of a math error. For example, maybe you are dividing by zero
-270	Macro error	Indicates that a macro-related execution error occurred
-271	Macro syntax error	Indicates a syntax error within the macro definition
-272	Macro execution error	Indicates that a syntactically legal macro program data sequence could not be executed due to some error in the macro definition
-273	Illegal macro label	Indicates that the macro label defined in the *DMC command was a legal string syntax, but could not be accepted
-274	Macro parameter error	Indicates that the macro definition improperly used a macro parameter placeholder
-275	Macro definition too long	Indicates that a syntactically legal macro program data sequence could not be executed because the string or block contents were too long for the device to handle
-276	Macro recursion error	Indicates that a syntactically legal macro program data sequence could not be executed because the device found it to be recursive
-277	Macro redefinition\ not allowed	Indicates that a syntactically legal macro label in the *DMC command could not be executed because the macro label was already defined
-278	Macro header not found	Indicates that a syntactically legal macro label in the *GMC? query could not be executed because the header was not previously defined

Err#	Message	Verbose/Correction Information
-280	Program error	There was an execution error in a down-loaded program. The exact problem cannot be specifically identified
-281	Cannot create program	Indicates that an attempt to create a program was unsuccessful. A reason for the failure might include not enough memory
-282	Illegal program name	The name used to reference a program was invalid; for example, redefining an existing program, deleting a nonexistent program, or in general, referencing a nonexistent program
-283	Illegal variable name	An attempt was made to reference a nonexistent variable in a program
-284	Program currently running	Certain operations dealing with programs may be illegal while the program is running; for example, deleting a running program might not be possible
-285	Program syntax error	Indicates that a syntax error appears in a downloaded program. The syntax used when parsing the downloaded program is device-specific
-286	Program runtime error	
-290	Memory use errors	
-291	Out of memory	
-292	Referenced name does not exist	
-293	Referenced name already exists	
-294	Incompatible type	Indicates that the type or structure of a memory item is inadequate

Instrument Messages  
Event Messages

**-100 to -199, Command Errors**

Err#	Message	Verbose/Correction Information
-100	Command error	There is a problem with the command. The exact problem cannot be specifically identified
-101	Invalid character	An invalid character was found in part of the command
-102	Syntax error	An unrecognized command or data type was found, for example a string was received for a command that doesn't accept strings
-103	Invalid separator	The command was supposed to contain a separator but we found an illegal character. For example, the semicolon was omitted after a command string
-104	Data type error	A data type differed from what was expected. For example, numeric or string data was expected, but block data was found
-105	GET not allowed	A Group Execute Trigger was received within a program message
-108	Parameter not allowed	More parameters were received than were expected for the command. For example, the *ESE common command only accepts one parameter, so sending *ESE 0,1 is not allowed
-109	Missing parameter	Fewer parameters were received than required for this command
-110	Command header error	This is a general error that is generated when a problem is found in a command header, but no more specific information is available
-111	Header separator error	An illegal character was found in a command where a separator was expected
-112	Program mnemonic too long	The command contains a keyword that has more than twelve characters
-113	Undefined header	The command meets the SCPI syntax requirements, but is not valid in the current measurement environment
-114	Header suffix out of range	The value of a numeric suffix that is attached to a program mnemonic makes the header invalid. (A suffix is usually units, like Hz or DB)
-115	Unexpected number of parameters	The number of parameters received does not correspond to the number of parameters expected.
-120	Numeric data error	An error was found in a data element that appears to be numeric. The exact problem cannot be specifically identified
-121	Invalid character in number	A character was found that is not valid for the data type. For example, an alpha in a decimal numeric or a "9" in octal data
-123	Exponent too large	The magnitude of an exponent was greater than 32000
-124	Too many digits	The mantissa of a decimal-numeric contained more than 255 digits, excluding leading zeros
-128	Numeric data not allowed	A legal numeric data element was found, but that is not a valid element at this position in the command
-130	Suffix error	A problem was found in a suffix (units). The exact problem cannot be specifically identified
-131	Invalid suffix	There is a syntax problem with the suffix. You need to use the suffix (units) that are allowed by this command
-134	Suffix too long	The suffix contained more than twelve characters
-138	Suffix not allowed	A suffix was found after a numeric element that does not allow suffixes (units)
-140	Character data error	A problem was found with a character data element. The exact problem cannot be specifically identified

Err#	Message	Verbose/Correction Information
-141	Invalid character data	Either the character data element contains an invalid character or the element itself is not valid for this command
-144	Character data too long	The character data element contains more than twelve characters
-148	Character data not allowed	A character data element that you sent is valid, but it is not allowed at this point in the parsing
-150	String data error	A problem was found with a string data element. The exact problem cannot be specifically identified
-151	Invalid string data	A string type of data element was expected, but it is invalid for some reason. For example, an END message was received before the terminal quote character
-158	String data not allowed	A string data element that you sent is valid, but it is not allowed at this point in the parsing
-160	Block data error	A problem was found with a block data element. The exact problem cannot be specifically identified
-161	Invalid block data	A block data element was expected, but it was invalid. For example, an END message was received before the end length was satisfied
-168	Block data not allowed	A legal block data element was found, but it is not allowed at this point in the parsing
-170	Expression error	A problem was found with an expression data element. The exact problem cannot be specifically identified
-171	Invalid expression	An expression data element is not valid. For example, there may be unmatched parentheses or an illegal character
-178	Expression data not allowed	A legal expression data was found, but it is not allowed at this point in the parsing
-180	Macro error	A problem was found with a macro element. The exact problem cannot be specifically identified
-181	Invalid outside macro definition	Indicates that a macro parameter placeholder was encountered outside of a macro definition
-183	Invalid inside macro definition	Indicates that the program message unit sequence, sent with a *DDT or *DMC command, is syntactically invalid
-184	Macro parameter error	Indicates that a command inside the macro definition had the wrong number or type of parameters

## 0 Error

Err#	Message	Verbose/Correction Information
0	No error	The queue is empty. Either every error in the queue has been read, or the queue was cleared by power-on or *CLS

## Condition Messages

Condition messages are displayed in the STATUS message area in the bottom right of the display. Condition messages are classified as either “Errors” or “Warnings.” In the tables in this section, an E in the **Error or Warning** column means that an error is displayed on the front panel and sent out to SCPI when this condition is detected. A W in this column means that a Warning is displayed on the front panel, but nothing is sent to SCPI.

For each Condition Message, there is a corresponding bit in one of the SCPI Status Registers. These bits are listed in the tables below. Some messages exist **only** as status bits; for these messages the **Error or Warning** column entry specifies “status bit only”.

### Condition errors 1 to 99, Calibration

These errors correspond to the STATUS:QUESTIONABLE:CALIBRATION register (see [“X-Series Status Register System” on page 75](#)). Since this register is fanned out to three sub-registers, with summary bits in the main STATUS:QUESTIONABLE:CALIBRATION register, each sub-register has its own range of error numbers.

### Condition Errors 6 to 34, Calibration Skipped

This series of errors corresponds to the bits in the STATUS:QUESTIONABLE:CALIBRATION:SKIPPED sub-register (see [“X-Series Status Register System” on page 75](#)). The second column in the table shows the corresponding bit in that register.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated. These error numbers can be viewed in the Show Errors screen, along with the DETECTED and CLEARED indicators.

For example, error 6 indicates that the “RF Alignment being skipped” condition has been detected, and error 1006 indicates that failure has been cleared.

This register is summarized as bit 11 of the STATUS:QUESTIONABLE:CALIBRATION register, as described in section [“Condition Errors 36 to 64, Calibration Needed or Failed” on page 57](#).

Err#	Bit in status register	Message	Error or Warning	More Information
6	0	Align RF Skipped	W	
8	1	unused		
10	2	unused		
12	3	unused		
14	4	unused		
16	5	unused		
18	6	unused		
20	7	unused		
22	8	unused		
24	9	unused		
26	10	unused		
28	11	unused		
30	12	unused		
32	13	unused		

Err#	Bit in status register	Message	Error or Warning	More Information
34	14	unused		

## Condition Errors 36 to 64, Calibration Needed or Failed

This series of errors corresponds to the bits in the `STATUS:QUESTIONABLE:CALIBRATION` register (see ["X-Series Status Register System" on page 75](#)). The second column in the table shows the corresponding bit in that register.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated. These error numbers can be viewed in the Show Errors screen, along with the DETECTED and CLEARED indicators.

For example, error 42 indicates that the "RF Alignment Failure" condition has been detected, and error 1042 indicates that failure has been cleared.

Several bits in this register are "summary bits" for registers at a lower level. There are no error messages associated with these bits; they exist only as status bits, which can be read with a `STATUS:QUESTIONABLE:CALIBRATION?` event query or a `STATUS:QUESTIONABLE:CALIBRATION:CONDITION?` query.

Note that these summary bits summarize the state and history of the event registers at the lower level. This is true even for bits in the `STATUS:QUESTIONABLE:CALIBRATION` condition register. This means that:

- The summary bits read by the `STATUS:QUESTIONABLE:CALIBRATION:CONDITION?` query are true if any event bits are set in any of the `:CALIBRATION` sub-registers `:SKIPPed`, `:EXTended:NEEDed` or `:EXTended:FAILure`.
- The summary bits read by the `STATUS:QUESTIONABLE:CALIBRATION?` event query are true if any event bit has undergone a false-to-true transition with the `PTRansition` filter set, or a true-to-false transition with the `NTRansition` filter set, in any of the `:CALIBRATION` sub-registers `:SKIPPed`, `:EXTended:NEEDed` or `:EXTended:FAILure`.

Thus, the summary bits **cannot** be used to determine the current state of a lower level condition bit; only the state and history of the lower level event bits.

This register is itself summarized as bit 8 of the `STATUS:QUESTIONABLE` register, as described in the section ["Condition Errors 601 to 699, Error Summaries" on page 69](#).

Err#	Bit in status register	Message	Error or Warning	More Information
36	0	unused		
38	1	unused		
40	2	TG Alignment Failure	E	
42	3	RF Alignment Failure	E	
44	4	IF Alignment Failure	E	
46	5	LO Alignment Failure	E	
48	6	ADC Alignment Failure	E	
50	7	FM Demod Alignment Failure	E	
52	8	Extended Align Needed Summary	status bit only	This bit is the summary bit for the <code>STATUS:QUESTIONABLE:CALIBRATION:EXTended:NEEDed</code> sub-register.
54	9	Extended Align Failure Summary	status bit only	This bit is the summary bit for the <code>STATUS:QUESTIONABLE:CALIBRATION:EXTended:FAILure</code> sub-register.
56	10	unused		

## Instrument Messages

### Condition Messages

Err#	Bit in status register	Message	Error or Warning	More Information
58	11	Align Skipped Sum Summary	status bit only	This bit is the summary bit for the STATUS:QUESTIONable:CALibration:SKIPPed sub-register.
60	12	Align Now, RF required	E	
62	13	unused		
64	14	Align Now, All required	E	In PSA, this was error 64

### Condition Errors 65 to 92, Calibration Needed (Extended)

This series of errors corresponds to the bits in the STATUS:QUESTIONable:CALibration:EXTended:NEEDED sub-register (see “X-Series Status Register System” on page 75). The second column in the table below shows the corresponding bit in that register.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated. These error numbers can be viewed in the Show Errors screen, along with the DETECTED and CLEARED indicators.

For example, error 72 indicates that the “Input Attenuation not calibrated” condition has been detected, and error 1072 indicates that failure has been cleared.

This register is summarized as bit 8 of the STATUS:QUESTIONable:CALibration register, as described in the section “Condition Errors 36 to 64, Calibration Needed or Failed” on page 57.

Err#	Bit in status register	Message	Error or Warning	More Information
65	0	unused		
66	1	Align 9kHz-30MHz required	E	An EMI conducted frequency range alignment is needed.
68	2	Align 30MHz-1GHz required	E	An EMI radiated frequency range alignment is needed.
72	4	Input Attenuation not calibrated	E	Corrected measurements have been requested and the required RF front-end setting of x dB has not been calibrated.
74	5	unused		
76	6	unused		
78	7	unused		
80	8	unused		
82	9	unused		
84	10	unused		
86	11	unused		
88	12	unused		
90	13	unused		
92	14	unused		

## Condition Errors 67 to 95, Calibration Failure (Extended)

This series of errors corresponds to the bits in the `STATUS:QUESTIONABLE:CALIBRATION:EXTENDED:FAILURE` sub-register (see “X-Series Status Register System” on page 75). The second column in the table shows the corresponding bit in that register.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated. These error numbers can be viewed in the Show Errors screen, along with the DETECTED and CLEARED indicators.

For example, error 71 indicates that the Characterize Preselector Failure has been detected, error 1071 indicates that failure has been cleared.

This register is summarized as bit 9 of the `STATUS:QUESTIONABLE:CALIBRATION` register, as described in the section “Condition Errors 36 to 64, Calibration Needed or Failed” on page 57.

Err#	Bit in status register	Message	Error or Warning	More Information
67	0	Align 9kHz to 30MHz failed	W	In PSA, this was error 13749
69	1	Align 30MHz to 1GHz failed	W	In PSA, this was error 13751
71	2	Characterize Preselector failure	W	The preselector characterization routine failed.
73	3	unused		
75	4	unused		
77	5	unused		
79	6	unused		
81	7	unused		
83	8	unused		
85	9	unused		
87	10	unused		
89	11	unused		
91	12	unused		
93	13	unused		
95	14	unused		

## Condition Errors 101 to 199, Measurement Integrity

This series of errors corresponds to the bits in the `STATUS:QUESTIONABLE:INTEGRITY` register (see “X-Series Status Register System” on page 75). The second column in the table shows the corresponding bit in that register.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated. These error numbers can be viewed in the Show Errors screen, along with the DETECTED and CLEARED indicators.

For example, error 141 indicates an Input Overload condition has been detected, error 1129 indicates that failure has been cleared.

Two bits in this register are “summary bits” for registers at a lower level. There are no error messages associated with these bits; they exist only as status bits, which can be read with a `STATUS:QUESTIONABLE:INTEGRITY?` event query or a `STATUS:QUESTIONABLE:INTEGRITY:CONDITION?` query.

## Instrument Messages

### Condition Messages

Note that these summary bits summarize the state and history of the event registers at the lower level. This is true even for bits in the `STATUS:QUESTIONABLE:INTEGRITY` condition register. This means that:

- The summary bits read by the `STATUS:QUESTIONABLE:INTEGRITY:CONDITION?` query are true if any event bits are set in any of the `:INTEGRITY` sub-registers `:SIGNAL` or `:UNCALIBRATED`.
- The summary bits read by the `STATUS:QUESTIONABLE:INTEGRITY?` event query are true if any event bit has undergone a false-to-true transition with the `PTRANSITION` filter set, or a true-to-false transition with the `NTRANSITION` filter set, in any of the `:INTEGRITY` sub-registers `:SIGNAL` or `:UNCALIBRATED`.

Thus, the summary bits **cannot** be used to determine the current state of a lower level condition bit; only the state and history of the lower level event bits.

This register is itself summarized as bit 9 of the `STATUS:QUESTIONABLE` register, as described in the section [“Condition Errors 601 to 699, Error Summaries” on page 69](#).

Err#	Bit in status register	Message	Error or Warning	More Information
133	0	Signal Summary	status bit only	This bit is the summary bit for the <code>STATUS:QUESTIONABLE:INTEGRITY:SIGNAL</code> sub-register.
135	1	No Result	E	
135	1	No Result; Turn on MCE	E	To calculate Timing and Phase results in the Code Domain Power view of Mod Accuracy, the "Multi Channel Estimator" must be set to ON. Otherwise these results are invalid.
135	1	No Result; Meas invalid with I/Q inputs	E	The current measurement does not support I/Q input; switch to the RF or another input or select a different measurement
137	2	unused		
139	3	Uncalibrated Summary	status bit only	This bit is the summary bit for the <code>STATUS:QUESTIONABLE:INTEGRITY:UNCALIBRATED</code> sub-register.
141	4	Input Overload	E <sup>a</sup>	
141	4	Input Overload; ADC over range	E <sup>a</sup>	The signal at the input to the IF section is too high. You should increase the attenuation or lower the signal level.
141	4	Input Overload; I/Q ADC over range	E <sup>a</sup>	The I or Q input exceeds the ADC upper limit.
141	4	Input Overload; I/Q Voltage over range	E <sup>a</sup>	The input voltage on the I or Q channel exceeds the channel limit. In differential mode the over voltage may occur without causing an ADC overload, for example, if I is at +5.01 V and I-bar is at +5.0 the ADC will be in range but both I and I-bar will exceed the voltage limit.
141	4	Input Overload; RF Preselector Overload	E <sup>a</sup>	The level at the input of the MXE RF Preselector has exceeded tolerances, reduce the input level
143	5	unused		
145	6	unused		
147	7	Insufficient Data	E	
147	7	Insufficient Data; Incr. Demod Time	E	There is insufficient acquisition data to provide accurate metrics. You should increase the Demod Time to acquire enough data.

Err#	Bit in status register	Message	Error or Warning	More Information
147	7	Insufficient Data; frequency list empty	E	A measurement was attempted with List frequency mode or a SCPI query of the frequency list table was made and the frequency list table is empty.
147	7	Insufficient Data; ENR table empty	E	A measurement was attempted or a SCPI query of an ENR table was made and there were no entries in the relevant ENR table (Common, Meas or Cal).
147	7	Insufficient Data; Loss table empty	E	A measurement is attempted or a SCPI query of a before or after loss table is made and there are no entries in the relevant loss table
149	8	Meas Error		
151	9	Memory Error	E	
151	9	Memory Error; Shorten capture interval	E	A shortage of free memory related to longer capture intervals has occurred. The measurement is aborted and all results return invalid values
153	10	I/O Error	E	
153	10	I/O Error; Ext Source needs IP Addr	E	No IP address entered for external source and external LO control is ON.
155	11	Trig Error	E	
157	12	Invalid Data	Status bit only	This is the "invalid data indicator", same as the "*" in the upper right corner of the screen. It means that the on-screen annotation does not match the on-screen data, usually because a measurement is pending after a settings change. There is no message in the status line and nothing in the history queue, but there IS an on-screen indication and a status bit.
159	13	Settings Alert	W	
159	13	Settings Alert; LO may overload IF	W	If the sweep type is Swept, the start frequency of the instrument is less than 10 MHz, and you put Swept IF Gain in Manual High, then a warning condition is generated and remains in effect as long as this condition exists.  In some older analyzers this was error 1109.
159	13	Settings Alert; Diff probe mismatch; <I Q I,Q>	W	The attenuation values of the two probes on the I and/or Q channels differ by too much for a valid differential reading.
159	13	Settings Alert; Acquisition truncated	W	In the Analog Demod mode, certain extreme settings combinations will result in a required acquisition length in excess of the capacity of the analyzer. Increase the AF Spectrum RBW or the RF Spectrum RBW, decrease the Channel BW, and/or decrease the Demod Waveform Sweep Time.
159	13	Settings Alert; Analog Out settings conflict	W	The user has manually set the Analog Output under the Input/Output menu to a setting that conflicts with the current measurement. There will be no output on the Analog Out port until this conflict is resolved. In most cases, simply set Analog Out to Auto for the optimal setting.

## Instrument Messages

### Condition Messages

Err#	Bit in status register	Message	Error or Warning	More Information
159	13	Settings Alert; I/Q mismatch: <Differential Input Z Attenuation>	W	The impedance, differential, or attenuation settings for the I and Q channels do not match. For valid I+jQ measurements the impedance and differential settings should be the same on both channels and the attenuation should match within 1 dB
159	13	Settings Alert; Parm/data mismatch	W	For Bluetooth, the detected parameters did not match the data
159	13	Settings Alert; Src pwr ramp>ALC range	W	You have selected a Power Sweep range that exceeds the ability of the external Source to follow without changing mechanical attenuation. Lower the Power Sweep range.
159	13	Settings Alert; Sweep Rate Unavailable	W	The auto coupled sweep time exceeds the maximum allowed. Therefore, full amplitude accuracy cannot be attained. Please increase the RBW or reduce the span.
159	13	Settings Alert; Span:RBW Ratio too big	W	The chosen large ratio of span to RBW is not possible. Please reduce the span or increase the RBW and/or FFT Width.
159	13	Settings Alert; Freq>USB Preamp max	W	The highest analysis frequency exceeds the frequency range of the USB preamp used.  In Noise Figure measurement applications, this situation will cause gradual degradation of uncertainty with increasing frequency.  In Spectrum Analyzer applications, this will cause rapidly declining amplitude accuracy with increasing frequency.
161	14	Setting Modified	E	
161	14	Setting Modified; Filter not applied	E	The filter you have selected is larger than the sampling frequency. You should select a different filter.

- a. The Input Overload error is not reported to the SCPI queue unless the :SYSTem:ERRor:OVERload ON command has been issued, however it always sets the status bit. For details of the :SYSTem:ERRor:OVERload command, see any [X-Series User's & Programmer's Reference](#).

## Condition Errors 201 to 299, Signal Integrity

This series of errors corresponds to the bits in the `STATus:QUESTIONable:INTEgrity:SIGNal` sub-register (see ["X-Series Status Register System" on page 75](#)). The second column in the table shows the corresponding bit in that register.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated. These error numbers can be viewed in the Show Errors screen, along with the DETECTED and CLEARED indicators.

For example, error 207 indicates a Burst Not Found condition has been detected, error 1207 indicates that failure has been cleared.

This register is summarized as bit 0 of the STATUS:QUESTIONABLE:INTEGRITY register, as described in the section “Condition Errors 101 to 199, Measurement Integrity” on page 59.

Err#	Bit in status register	Message	Error or Warning	More Information
203	0	unused	E	
205	1	unused	E	
207	2	Burst Not Found	E	<p>The burst signal cannot be detected because of inappropriate parameter settings or incorrect signal.</p> <p>An in appropriate parameter setting could cause the signal to be partially, rather than fully, on the display, Burst Search Threshold and/or Burst Search Length may need to be adjusted.</p> <p>An incorrect signal could have either insufficient power, the rising or falling edges cannot be detected, or the burst is less than 126 microseconds.</p> <p>Carrier signal is not actually bursted.</p> <p>W-CDMA: Either the signal being analyzed has insufficient power, the rising or falling edges cannot be detected, or the burst is less than 126 microseconds.</p> <p>W-CDMA: Cannot synchronize measurement with PRACH channel for Power Control measurement, because the signal cannot be found. Make sure PRACH is present in the W-CDMA uplink signal, and that the preamble signature and scramble code are set correctly.</p> <p>GSM: Data was acquired but a GSM burst was not found, with the timeslot mode disabled.</p> <p>NADC, PDC: A valid burst is not found when the Device is MS.</p> <p>1xEV-DO: Data was acquired but a 1xEV burst was not found, with the timeslot mode disabled.</p> <p>Bluetooth: The burst that has been found does not correspond to the currently selected Bluetooth packet type (the burst length may be too short).</p> <p>WLAN: The instrument cannot find a valid WLAN burst. You may need to extend the search length.</p> <p>In PSA, this error was reported as one of the following error numbers: 10772, 13104, 10160, 10286, 10420, 10454, 10614, 10904, 10928, 13074, 10287</p>
207	2	Burst not found;with selected Time Slot	E	The selected timeslot does not contain the expected burst.
209	3	Timing Error	E	
209	3	Timing Error:No time ref pilot burst	E	The pilot burst used for time reference is not active.
211	4	Carrier(s) incorrect or missing	E	In PSA, this error was reported as one of the following error numbers: 10165, 10173, 10178, 10419, 10421, 10535, 10560, 10642, 10648, 10650, 10960
213	5	Freq Out of Range	E	
213	5	Freq Out of Range; System input (IF)	E	One or more system input frequencies are out of range. If using a frequency list, check that all entries are valid for current measurement mode.

Instrument Messages  
Condition Messages

Err#	Bit in status register	Message	Error or Warning	More Information
213	5	Freq Out of Range; External LO	E	One or more external LO frequencies are out of range. Check that the LO frequency limits are set correctly and check the entered measurement frequencies and measurement mode.
215	6	Sync Error	E	W-CDMA: Cannot sync DPCCH pilot. Cannot synchronize measurement with DPCCH pilot for Power Control measurement, because the pilot signal cannot be found. Make sure DPCCH is present in the W-CDMA uplink signal, and that the slot format and scramble code are set correctly.
215	6	Sync Error;No pilot burst	E	There is no Pilot burst detected.
215	6	Sync Error;Sync code not found	E	Synchronization code is not found in the measured time slot.
215	6	Sync Error;No freq ref pilot burst	E	The pilot burst used for frequency reference is not active.
215	6	Sync Error;Midamble sync fail	E	Failed to find the uplink slot, which caused the synchronization with the Midamble to fail.
215	6	Sync Error;Preamble length zero	E	Burst type is "Data" or "Preamble" and the measurement cannot find a Preamble
217	7	Demod Error	E	<p>This error is normally generated because of one of the following reasons:</p> <ol style="list-style-type: none"> <li>1. There is no carrier signal.</li> <li>2. Walsh channels other than the pilot are active.</li> <li>3. There is some other modulation problem that will prevent the measurement from being made.</li> </ol> <p>This problem must be corrected before the measurement can continue.</p> <p>cdma 2000 &amp; W-CDMA: Cannot correlate to the input signal and no active channel is found. (from composite EVM measurement) An active channel must meet the default threshold criteria that it is within 20 dB of the highest power code channel. The threshold can be changed using the active set threshold function in the Meas Setup menu.</p> <p>cdmaOne: A correlation failure with the pilot CDMA channel occurred during synchronous demodulation.</p> <p>1xEV-DO: Cannot correlate to the input signal and no active channel is found. (from composite EVM measurement) An active channel must meet the default threshold criteria that it is within 20 dB of the highest power code channel. The threshold can be changed using the active set threshold function in the Meas Setup menu.</p> <p>In PSA, this error was reported as one of the following error numbers: 10872, 10962, 13070, 10228, 10768</p>
217	7	Demod Error;Can't correlate	E	Cannot correlate to the input signal and no active channel is found. (from composite EVM measurement) An active channel must meet the default threshold criteria that it is within 20 dB of the highest power code channel. The threshold can be changed using the active set threshold function in the Meas Setup menu.

Err#	Bit in status register	Message	Error or Warning	More Information
217	7	Demod Error;Data interval too short	E	There are not enough input I/Q pairs for the measurement calculation. This may be caused by an incorrect data capture.
217	7	Demod Error;No active channel	E	There is no active channel detected.
217	7	Demod Error;Not an active slot	E	There is no active slot detected.
217	7	Demod Error;No full subframe found	E	No sub-frame or only part of one sub-frame is detected.
217	7	Demod Error;Muxed bits not found	E	Multiplexed Data Demod Bits are not generated even though Data channel is selected, because all 16 data code channels are not active
217	7	Demod Error;Acq Time too short	E	For Bluetooth, the detected packet type doesn't match the captured packet type because the payload start, end or data could not be found.
219	8	Signal Too Noisy	E	NADC & PDC: The valid EVM measurement cannot be performed, because the input signal is too noisy. GSM & EDGE: In a GSM measurement, indicates that a burst could not be found in a signal that appears noisy. In PSA, this error was reported as one of the following error numbers: 10702, 10824, 10906, 10930, 13024, 10626, 111
221	9	Slot Error	E	
221	9	Slot error;No active slot found	E	No valid active slot found in captured data, or no active slot found in captured interval. Synchronization may succeed and pilot found when this message is issued, but no results are included in peak/average calculation.
221	9	Slot Error; No idle slot found	E	No valid idle slot found in captured data, or no idle slot found in captured interval. Synchronization may succeed and pilot found when this message is issued, but no results are included in peak/average calculation.
223	10	unused	E	
225	11	unused	E	
227	12	unused	E	
229	13	unused	E	
231	14	unused	E	

## Condition Errors 301 to 399, Uncalibrated Integrity

This series of errors corresponds to the bits in the `STATUS:QUESTIONABLE:INTEGRITY:UNCALIBRATED` sub-register (see "X-Series Status Register System" on page 75). The second column in the table shows the corresponding bit in that register.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated. These error numbers can be viewed in the Show Errors screen, along with the DETECTED and CLEARED indicators.

## Instrument Messages

### Condition Messages

For example, error 301 indicates a Meas Uncal condition has been detected, error 1301 indicates that failure has been cleared.

This register is summarized as bit 3 of the `STATUS:QUESTIONABLE:INTEGRITY` register, as described in the section “Condition Errors 101 to 199, Measurement Integrity” on page 59.

Err#	Bit in status register	Message	Error or Warning	More Information
301	0	Meas Uncal	W	
303	1	Signal ID on	W	
305	2	No Long Code Phase	W	
307	3	AC coupled: Accy unspec'd <10 MHz	W	AC input coupling will function at lower frequencies, but the performance is not specified below 10 MHz.
309	4	User cal	W	
309	4	User Cal; Cal invalidated	E,W	<p>The existing user cal has been invalidated for one of the following reasons:</p> <p><b>Frequency:</b> Setting the frequency outside the current valid user cal set (for example: If the current sweep range is 2 to 3GHz, then setting the start frequency to 1.9 GHz will invalidate the current user cal. Other frequency changes that will invalidate the user cal are:</p> <ul style="list-style-type: none"> <li>• If the cal was performed at a fixed frequency and you change this frequency.</li> <li>• If you are in "Freq List" mode and you change it to extend beyond the current user cal range. In this case you will see an error message.</li> </ul> <p><b>DUT Type:</b> If the DUT Type parameter changes, causing the measurement frequencies to be pushed outside the current cal.</p> <p><b>Attenuation:</b> If an attenuation setting is selected but has not been calibrated.</p> <p><b>Preamp:</b> If set to condition different from current cal settings, for example: if calibrated with the preamp on, turning it off will invalidate the cal.</p> <p><b>Points:</b> Changing the number of measured frequency points can make the stored preselector offsets become inaccurate and hence invalidate the calibration. This occurs when the following conditions exist:</p> <ul style="list-style-type: none"> <li>• A successful calibration has been performed.</li> <li>• Some measured freq points are &gt; 3.6 GHz.</li> <li>• The new points &gt; 3.6 GHz are located more than 50 MHz away from the current calibration points.</li> </ul>
309	4	User Cal; Freq outside cal range	E	The existing user cal has been invalidated because the current measurement frequencies lie partially or wholly outside the range of frequencies used for user-cal. (UNCAL)
309	4	User Cal; Cal will be interpolated	W	The measurement frequency range has been changed such that it is a subset of the calibrated range. (~CAL)
309	4	User Cal; Adjusted for new RBW	W	The measurement RBW has been changed since the last calibration (~CAL)

Err#	Bit in status register	Message	Error or Warning	More Information
311	5	Calibration	W	
311	5	Calibration; ENR table extrapolated	W	One or more calibration or measurement frequency points exceed the currently loaded Cal or Meas ENR Table frequency ranges. The corresponding ENR table's lowest frequency ENR value will be re-used for frequencies less than the table range, and the highest frequency ENR value will be re-used for frequencies greater than the table range. (~ENR)
311	5	Calibration; No ENR data present	W	No ENR Data (ENR)
313	6	Source Uncal	W	
313	6	Source Uncal;adj Start Freq or RBW	W	While using a Tracking Source, you must make sure the Start Frequency is high enough to avoid capturing LO feedthrough in the trace. This depends on both Start Freq and RBW. If you get this message, increase the Start Freq or narrow the RBW.
315	7	Preamp: Accy unspec'd <XX kHz	W	Preamp will function at lower frequencies, but the performance is not specified below XX kHz (XX is model number specific).
317	8	unused	W	
319	9	unused	W	
321	10	unused	W	
323	11	unused	W	
325	12	unused	W	
327	13	unused	W	
329	14	unused	W	

## Condition Errors 401 to 499, Power

This series of errors corresponds to the bits in the `STATUS:QUESTIONABLE:POWER` register (see “X-Series Status Register System” on page 75). The second column in the table shows the corresponding bit in that register.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated. These error numbers can be viewed in the Show Errors screen, along with the DETECTED and CLEARED indicators.

For example, error 409 indicates a 50 MHz Oscillator Unleveled condition has been detected, error 1409 indicates that failure has been cleared.

This register is summarized as bit 3 of the `STATUS:QUESTIONABLE` register, as described in the section “Condition Errors 601 to 699, Error Summaries” on page 69.

Err#	Bit in status register	Message	Error or Warning	More Information
401	0	RPP Tripped	W	(not currently in use)
403	1	Source Unleveled	W	

## Instrument Messages

### Condition Messages

Err#	Bit in status register	Message	Error or Warning	More Information
405	2	Source LO Unleveled	E	(not currently in use)
407	3	LO Unleveled	E	(not currently in use)
409	4	unused		
411	5	unused		
413	6	unused		
415	7	unused		
417	8	unused		
419	9	unused		
421	10	unused		
423	11	unused		
425	12	unused		
427	13	unused		
429	14	unused		

### Condition Errors 501 to 599, Frequency

This series of errors corresponds to the bits in the `STATUS:QUESTIONABLE:FREQUENCY` register (see [“X-Series Status Register System”](#) on page 75). The second column in the table shows the corresponding bit in that register.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated. These error numbers can be viewed in the Show Errors screen, along with the DETECTED and CLEARED indicators.

For example, error 503 indicates a Frequency Reference Unlocked condition has been detected, error 1503 indicates that failure has been cleared.

This register is summarized as bit 5 of the `STATUS:QUESTIONABLE` register, as described in the section [“Condition Errors 601 to 699, Error Summaries”](#) on page 69.

Err#	Bit in status register	Message	Error or Warning	More Information
501	0	Source Synth Unlocked	E	
503	1	Frequency Reference Unlocked	E	
505	2	2 <sup>nd</sup> LO Unlocked	E	
507	3	unused		
509	4	LO Unlocked	E	
511	5	unused		
513	6	IF Synthesizer Unlocked	E	
515	7	Calibration Oscillator Unlocked	E	

Err#	Bit in status register	Message	Error or Warning	More Information
517	8	unused		
519	9	Demodulation	E	
521	10	Ref missing or out of range	E	
521	10	Ref missing or out of range; External	E	The external frequency reference signal is missing or is not within the proper amplitude range. In PSA, this error was reported as error 622
521	10	Ref missing or out of range; Pulse	E	The pulse reference signal is missing or is not within the correct amplitude range.
523	11	unused		
525	12	unused		
527	13	unused		
529	14	unused		

## Condition Errors 601 to 699, Error Summaries

This series of errors corresponds to the bits in the `STATUS:QUESTIONABLE` register (see “X-Series Status Register System” on page 75), read with a `STATUS:QUESTIONABLE?` event query or a `STATUS:QUESTIONABLE:CONDITION?` query.

The second column in the table shows the corresponding bit in the status register. These bits do not have any corresponding error messages, although error numbers have been reserved for them as seen in the Err# column; they are status bits only.

The bits in the `STATUS:QUESTIONABLE` register are “summary bits” for registers at a lower level. Note that these summary bits summarize the state and history of the event registers at the lower level. This is true even for bits in the `STATUS:QUESTIONABLE` condition register. This means that:

- The summary bits read by the `STATUS:QUESTIONABLE:CONDITION?` query are true if any event bits are set in any of the `:QUESTIONABLE` sub-registers `:POWER`, `:TEMPERATURE`, `FREQUENCY`, `CALIBRATION` or `:INTEGRITY`.
- The summary bits read by the `STATUS:QUESTIONABLE?` event query are true if any event bit has undergone a false-to-true transition with the `PTRANSITION` filter set, or a true-to-false transition with the `NTRANSITION` filter set, in any of the `:QUESTIONABLE` sub-registers `:POWER`, `:TEMPERATURE`, `FREQUENCY`, `CALIBRATION` or `:INTEGRITY`.

Thus, the summary bits **cannot** be used to determine the current state of a lower level condition bit; only the state and history of the lower level event bits.

Err#	Bit in status register	Message	Error or Warning	More Information
601	0	unused		
603	1	unused		
605	2	unused		
607	3	Power	status bit only	This bit is the summary bit for the <code>STATUS:QUESTIONABLE:POWER</code> sub-register.
609	4	Temperature	status bit only	This bit is the summary bit for the <code>STATUS:QUESTIONABLE:TEMPERATURE</code> sub-register.

## Instrument Messages

### Condition Messages

Err#	Bit in status register	Message	Error or Warning	More Information
611	5	Frequency	status bit only	This bit is the summary bit for the STATUS:QUESTIONable:FREQUENCY sub-register.
613	6	unused		
615	7	unused		
617	8	Calibration	status bit only	This bit is the summary bit for the STATUS:QUESTIONable:CALIBRATION sub-register.
619	9	Integrity	status bit only	This bit is the summary bit for the STATUS:QUESTIONable:INTEGRITY sub-register.
621	10	unused		
623	11	unused		
625	12	unused		
627	13	unused		
629	14	unused		

### Condition Errors 701 to 799, Operation

This series of errors corresponds to the bits in the STATUS:OPERATION register (see ["X-Series Status Register System" on page 75](#)), which can be read with a STATUS:OPERATION? event query or a STATUS:OPERATION:CONDITION? query.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated.

For example, error 721 indicates that the DC Coupled condition has been detected; error 1721 indicates that condition has been cleared.

Unless otherwise noted in the **Error or Warning** column below, these are status bits only, with no corresponding error message or number

Err#	Bit in status register	Message	Error or Warning	More Information
701	0	Calibrating	status bit only	
703	1	Settling	status bit only	
705	2	unused		
707	3	Sweeping	status bit only	
709	4	Measuring	status bit only	
711	5	Waiting for Trigger	status bit only	
713	6	Waiting for Arm	status bit only	
715	7	unused		
717	8	Paused	status bit only	

Err#	Bit in status register	Message	Error or Warning	More Information
719	9	Source Sweeping	status bit only	The "Source Sweeping" bit is used to indicate various conditions, depending on the Mode of operation: In the List Sequencer mode, it is used to indicate that the sequencer is running In the EMI Receiver mode, it is used to indicate that scan results are available from the Frequency Scan measurement
721	10	DC Coupled	W	
723	11	unused		
725	12	Source Waiting for Trigger	status bit only	
727	13	unused		
729	14	unused		

### Condition Errors 801 to 899, Temperature

This series of errors corresponds to the bits in the `STATUS:QUESTIONABLE:TEMPERATURE` register (see ["X-Series Status Register System" on page 75](#)). The second column in the table shows the corresponding bit in that register.

An event with the error number shown in the table means the condition has been detected. When the condition is cleared, an event with the error number plus 1000 is generated. These error numbers can be viewed in the Show Errors screen, along with the DETECTED and CLEARED indicators.

For example, error 801 indicates that the Ref Osc Oven Cold condition has been detected; error 1801 indicates that condition has been cleared.

This register is summarized as bit 4 of the `STATUS:QUESTIONABLE` register, as described in the section ["Condition Errors 601 to 699, Error Summaries" on page 69](#).

Err#	Bit in status register	Message	Error or Warning	More Information
801	0	Reference Oscillator Oven Cold	W	(not currently in use)
803	1	unused		
805	2	unused		
807	3	unused		
809	4	unused		
811	5	unused		
813	6	unused		
815	7	unused		
817	8	unused		
819	9	unused		
821	10	unused		
823	11	unused		
825	12	unused		

Instrument Messages  
Condition Messages

Err#	Bit in status register	Message	Error or Warning	More Information
827	13	unused		
829	14	unused		

## 3 Status Register System & SCPI STATus Subsystem

### Where to find Detailed Information

Certain previous editions of this manual included a chapter titled "Status Subsystem", describing:

1. the Status Register System of X-Series instruments,
2. associated SCPI commands in the STATus Subsystem.

All this information can now be found in the "Programming the Analyzer" section of any of the following documents:

- a. the online Help for any Measurement Application of any X-Series instrument,
- b. the [X-Series User's & Programmer's Reference](#) manual for any Measurement Application of any X Series instrument.


Status Register System & SCPI STATUS Subsystem  
Status Register System Overview

## Status Register System Overview

A graphical overview of the X-Series Status Register system (split into two sections for readability) is provided in [Figure 3-1 on page 75](#) and [Figure 3-2 on page 76](#).

Figure 3-1


X-Series Status Register System

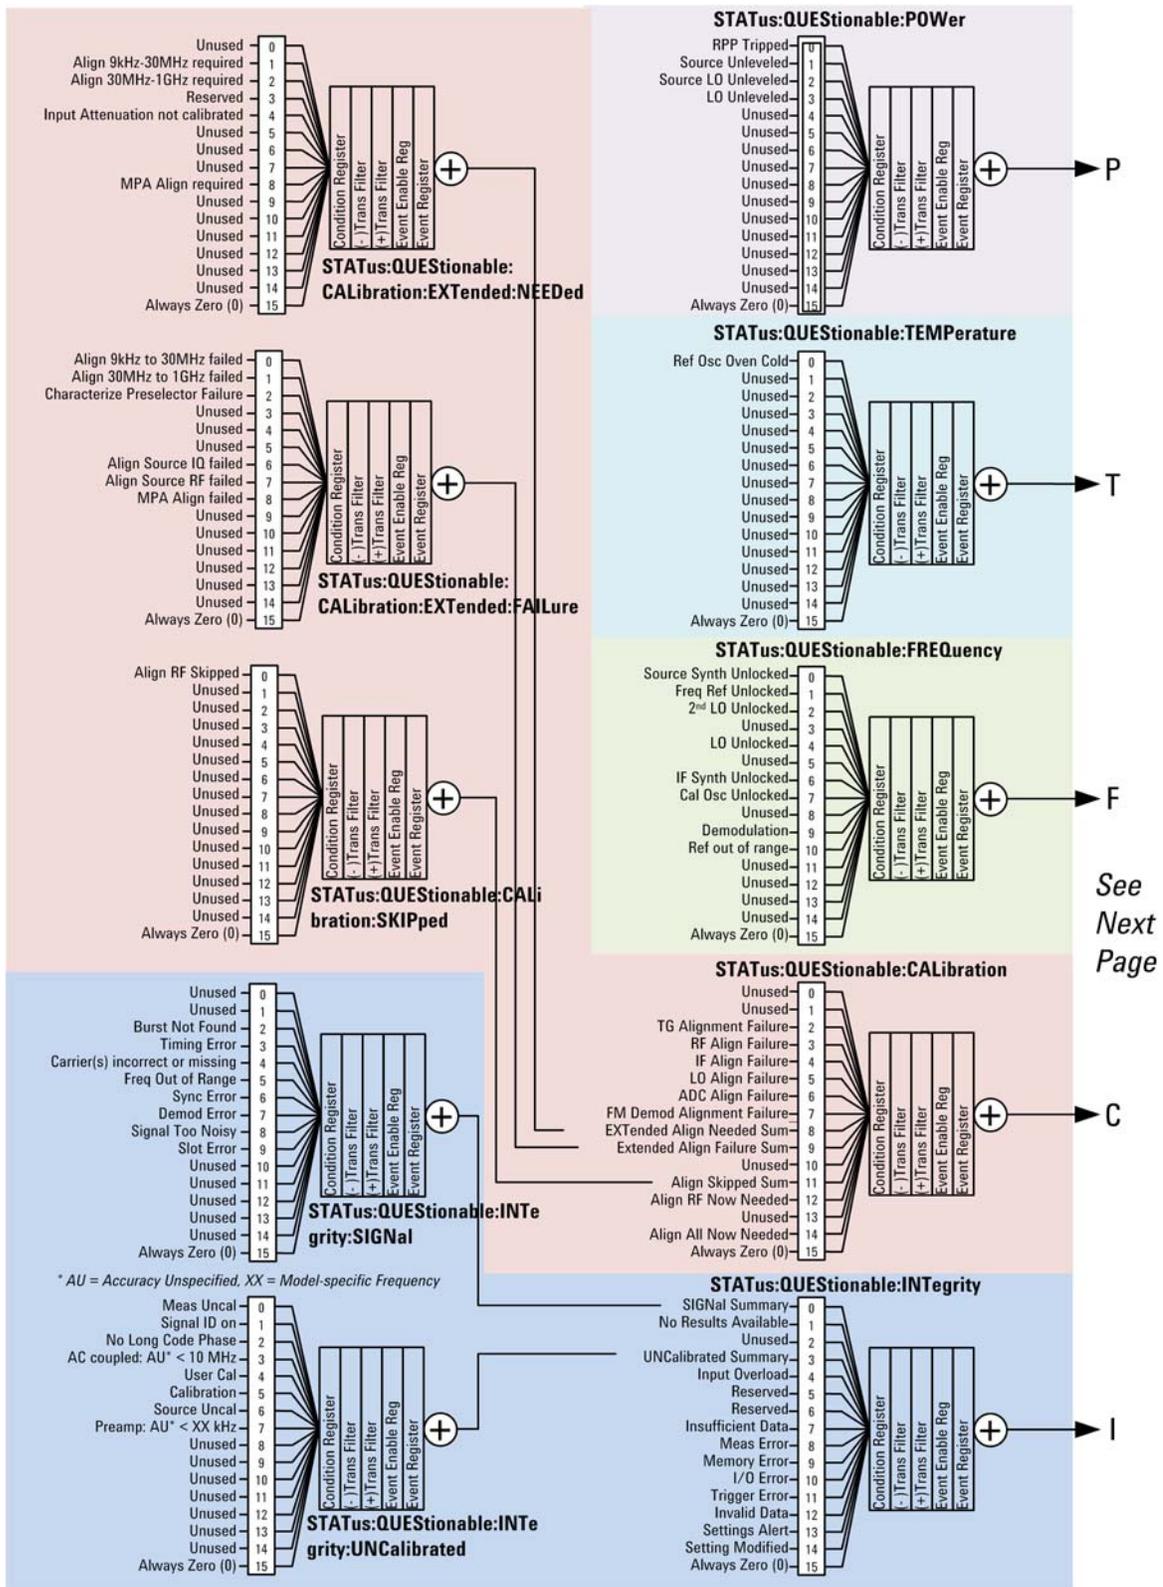

# Status Register System & SCPI STATus Subsystem

## Status Register System Overview

Figure 3-2 X-Series Status Register System (Continued)

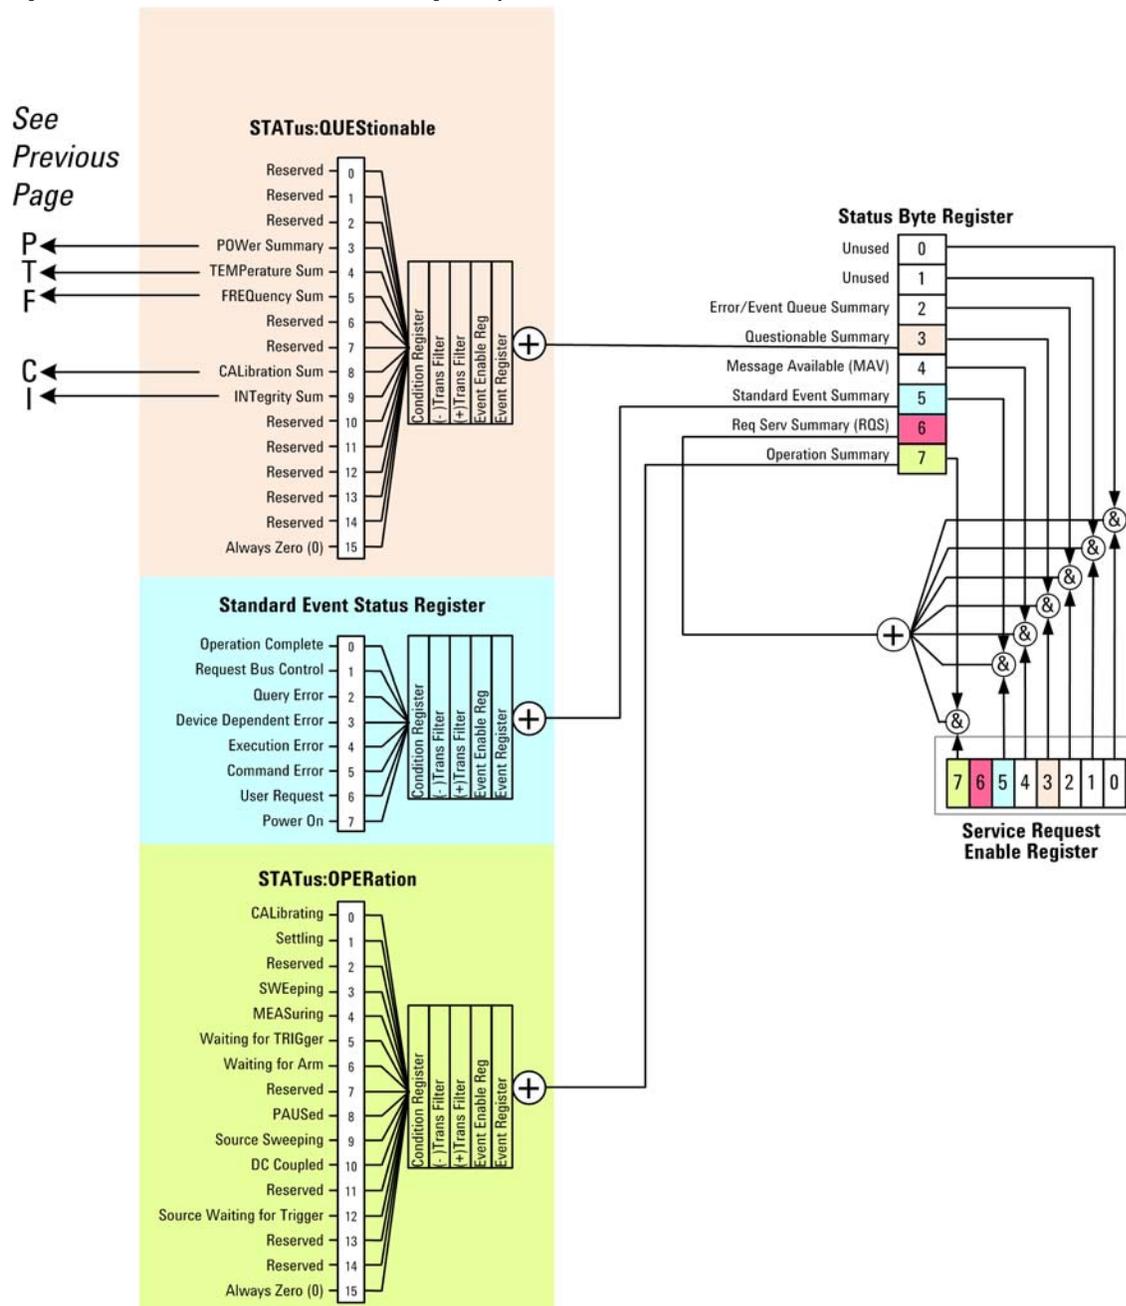

## A: References

### Documents & Web Sites

- 1999 SCPI Syntax & Style Standard**  
Section 21.8 defines the :ERROR Subsystem and standard error messages.  
May be downloaded in Acrobat (PDF) format from:  
<http://www.ivifoundation.org/docs/scpi-99.pdf>
- IEEE Standard 488.2–1992**  
IEEE Standard Codes, Formats, Protocols, and Common Commands for Use With IEEE Std 488.1-1987, IEEE Standard Digital Interface for Programmable Instrumentation  
May be downloaded in Acrobat (PDF) format from:  
[ieeexplore.ieee.org/iel1/2839/5581/00213762.pdf?arnumber=213762](http://ieeexplore.ieee.org/iel1/2839/5581/00213762.pdf?arnumber=213762)
- X-Series User's & Programmer's Reference**  
There is one such manual for each X-Series Measurement Application (Mode).  
You can download any User's & Programmers Reference in PDF format from the Keysight web site. For example, the manual for the Signal Analyzer Mode may be downloaded from:  
<http://literature.cdn.keysight.com/litweb/pdf/N9060-90027.pdf>