


Keysight Technologies

Oscilloscope Measurement Tools to Help Debug Automotive Serial Buses Faster

Application Note



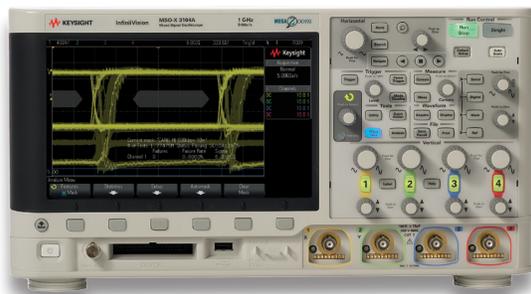

Introduction

The primary reason engineers use oscilloscopes to debug and characterize automotive serial buses, such as CAN, CAN FD, LIN, SENT, and FlexRay, is because of an oscilloscope's inherent ability to characterize the analog quality of these signals. Performing analog characterization using an oscilloscope is often referred to as "physical layer" measurements. Serial bus protocol analyzers are optimized at performing measurements at the "application layer". Instruments such as these are focused on providing trace flow of data at a higher abstraction level – but at the cost of providing little or no physical layer measurement capability. A scope is not a replacement for a serial bus protocol analyzer, but neither is a serial bus protocol analyzer a replacement for a scope. Engineers working on automotive serial bus applications typically have both.

Although there are many oscilloscopes on the market today from multiple vendors that offer automotive-focused options, the Keysight Technologies, Inc. InfiniiVision Series oscilloscopes offer some unique measurement capabilities (only available in Keysight scopes) for debugging and characterizing the physical layer of automotive serial buses including:

- Only oscilloscopes with hardware-based CAN-dbc symbolic decode and trigger
- Fastest oscilloscope waveform update rates to capture automotive transients
- Only oscilloscopes with hardware-based decoding for CAN, CAN FD, LIN, SENT, and FlexRay
- Only oscilloscopes with CAN and FlexRay eye-diagram mask testing
- Only oscilloscopes with a dual-bus time-interleaved protocol lister
- Only oscilloscopes with a real-time frame counter with bus utilization
- Only oscilloscopes with segmented memory acquisition with frame decoding in a lister display
- Only battery-operated oscilloscopes with automotive options
- Only oscilloscopes with FlexRay physical layer conformance test software and with complete test reporting
- Lowest price oscilloscopes with CAN, CAN FD, LIN, SENT, and FlexRay options

Fastest Oscilloscope Waveform Update Rate

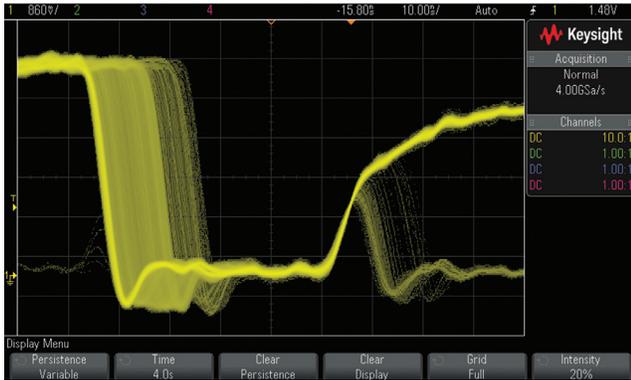


Figure 1: An update rate of 1,000,000 waveforms/sec easily captures infrequent glitches and jitter that other scopes miss.

With Keysight’s exclusive MegaZoom IV technology, the 3000 and 4000 X-Series oscilloscopes can update waveforms as fast as 1,000,000 waveforms per second (up to 50,000 waveforms per second when using a 2000 X-Series oscilloscope and up to 450,000 waveforms per second when using a 6000 X-Series oscilloscope). Even when capturing long waveforms while using the scope’s automatic deep acquisition memory – which is often required for automotive serial bus applications – Keysight’s InfiniiVision Series oscilloscopes remain responsive. A responsive scope not only enhances the usability of the instrument, but it also enhances the scope’s probability of capturing elusive events that may be problematic in an automotive design as shown in Figure 1. When using deep memory on other vendor’s oscilloscopes, waveform update rates can be extremely slow. Not only does this make the scope difficult to use, but this also decreases the scope’s probability of finding the infrequent glitch.

To learn more about oscilloscope waveform update rates, download Keysight’s application note titled, “Oscilloscope Waveform Update Rate Determines Probability of Capturing Elusive Events” listed at the end of this document.

Only Oscilloscopes with Hardware-based Decoding for CAN, CAN FD, LIN, SENT, and FlexRay

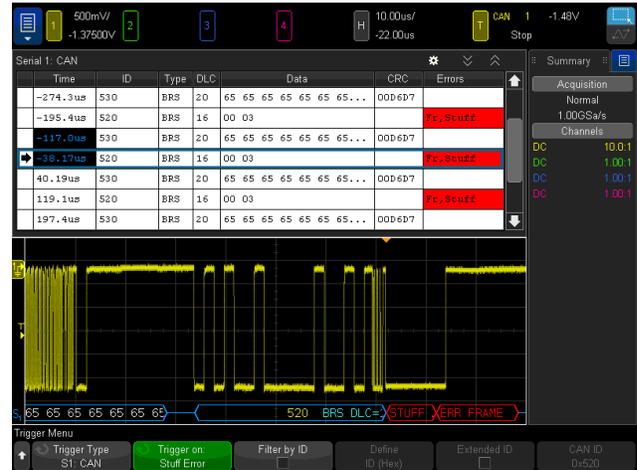


Figure 2: Hardware-based decoding captures and displays an infrequent CAN FD stuff bit error followed by an error frame that other scopes miss.

Keysight’s InfiniiVision Series oscilloscopes are the only oscilloscopes on the market today that utilize hardware-based decoding of the CAN, CAN FD (4000 X-Series), LIN, SENT (4000 X-Series), and FlexRay (3000, 4000 and 6000 X-Series only) serial buses. Hardware-based decoding provides a virtual real-time update of the decode trace. This enhances the scope’s probability of capturing and displaying infrequent serial bus communication errors, such as stuff bit errors, form errors, acknowledge errors, CRC errors, and error frames as shown in Figure 2.

CAN Symbolic-level Decoding and Triggering

A standard capability of the InfiniiVision 4000 and 6000 X-Series’ DSOX4AUTO/DSOX6AUTO options is CAN-dbc symbolic decode and triggering. Simply import an industry-standard .dbc file that defines your particular CAN network, and then the oscilloscope will automatically display messages and signals symbolically in human terms such as “Speed: 2.9016 krpm” as shown in Figure 3.



Figure 3: CAN-dbc symbolic decode and trigger.

Only Oscilloscopes with CAN and FlexRay Eye-diagram Mask Testing



Figure 4: CAN eye-diagram mask testing shows amplitude variations and timing uncertainties, including network propagation delays, from all frames and all bits.

The “workhorse” bus in all of today’s automobiles is the differential CAN bus. Keysight’s InfiniiVision X-Series oscilloscopes are the only scopes on the market today that can perform pass/fail CAN eye-diagram measurements on the CAN bus.

An oscilloscope eye-diagram provides a composite measure of the overall quality of the physical layer in one simple measurement. All recessive and dominant bits of the differential CAN bus are overlaid to show worst-case amplitude and worst-case timing of all bits from all frames as shown in Figure 4. The CAN eye-diagram measurement on Keysight’s InfiniiVision X-Series oscilloscopes not only shows amplitude variations of frames transmitted from various nodes in the system, but it also clearly shows network propagation delays during the arbitration and acknowledgement phases of frames.

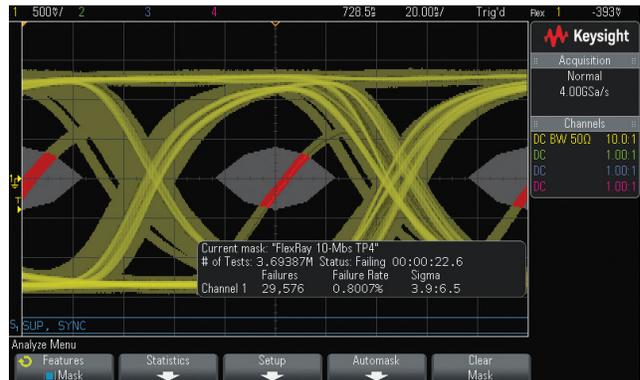


Figure 5: FlexRay eye-diagram mask test shows significant physical layer issues when probed at the input of a particular FlexRay receiver.

In addition to CAN eye-diagram mask testing, Keysight’s InfiniiVision Series oscilloscopes can also perform eye-diagram mask testing on the higher-speed differential FlexRay bus (3000, 4000 and 6000 X-Series only). Figure 5 shows an example of “TP4” eye-diagram mask test at the input of a FlexRay receiver. In this measurement example, we can see significant edge jitter, slow rising and falling edges, and a shifted bit that intersects the pass/fail mask causing mask test failures.

To learn more about eye-diagram testing on differential automotive buses, download Keysight’s application notes titled, “CAN Eye-diagram Mask Testing” and “FlexRay Eye-diagram Mask Testing” listed at the end of this document.

Only Oscilloscopes with a Dual-bus Time-interleaved Protocol Lister Display



Figure 6: Dual time-interleaved lister display makes it easier to track data through CAN-to-LIN gateways.

Only Oscilloscopes with a Real-time Frame Counter with Bus Utilization



Figure 7: Real-time frame counter and bus utilization measurement helps characterize CAN and FlexRay systems.




Figure 7a: Expanded view of the real-time frame counter

Most oscilloscopes on the market today with serial bus options can display decoded data in two formats. One format shows one or more decode traces time-correlated to the captured waveform. This decode trace is primarily useful when the scope's timebase is set up to view a single frame. On Keysight's InfiniiVision Series oscilloscopes, the time-correlated decode trace is always shown near the bottom of the scope's display (below the waveforms). The second decode format is what Keysight calls the "lister" display. The lister display shows a tabular list of decoded data with columns that are clearly labeled based on the fields for the specific protocol.

Today's automobiles utilize multiple buses for control and monitoring including the CAN, CAN FD, LIN, SENT, and FlexRay buses. Data within these buses sometimes needs to be passed from one bus to another. Automotive vendors use chips known as "gateways" to interchange data between buses. Keysight's 3000, 4000 and 6000 X-Series oscilloscopes are the only oscilloscopes on the market today that can display time-interleaved decoded data from two buses in the same lister display as shown in Figure 6. In this example, the LIN bus frames are shown in green while the CAN bus frames are shown in blue. The time-interleaved lister display makes it easy to trace data that is perhaps passed from one bus to another. Other scopes on the market can either display one table only, or two tables side-by-side. But even when two tables are displayed side-by-side, it can be very difficult to trace the data transfers between the buses.

For CAN and FlexRay applications, Keysight's InfiniiVision Series oscilloscopes are the only oscilloscopes on the market today that can count the number detected frames in real-time (no dead-time), including all frames, error frames (CAN, CAN FD), sync frames (FlexRay), and null frames (FlexRay). These frame counters run all the time, even when the scope's acquisition has been stopped as shown in Figure 7, as well as the expanded view of the real-time frame counter shown in Figure 7a. Note that there is no oscilloscope dead-time involved in this measurement.

Also important for characterizing CAN systems is a measure of bus utilization, or "bus load", in percent. This basically measures frame time relative to total time. If "bus load" gets too high in a CAN network, this will increase the probability of bus contention and errors. It also means that lower priority messages may have a more difficult time gaining access to the bus.

Only Oscilloscopes with Segmented Memory Acquisition with Frame Decoding in a Lister Display

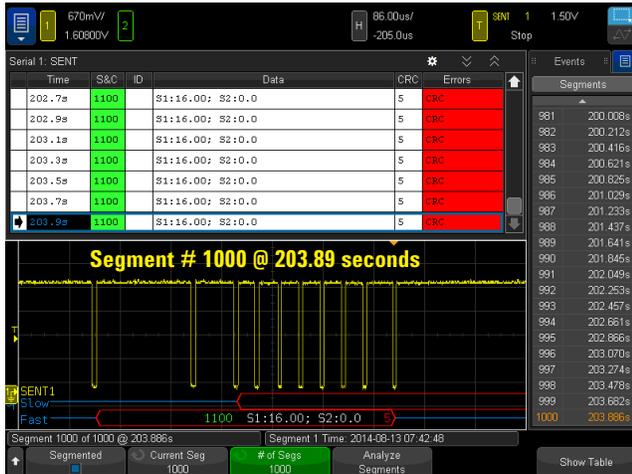


Figure 8: Segmented memory acquisition with automatic decoding selectively captures 1000 consecutive occurrences of SENT fast-channel CRC errors with precise time-tagging between each occurrence.

Automotive engineers often need to capture multiple and consecutive – yet selective – frames of serial data. For example, capture each consecutive occurrence of SENT (single edge nibble transmission) errors, without capturing everything in between. Without segmented memory acquisition, the alternative is to use a scope with extremely deep memory, and then wade through all that memory after capturing a very long record that includes all frames (not just selective frames). This can be costly, slow, and difficult.

Using Keysight's InfiniiVision Series oscilloscopes, engineers can set up the scope to capture up to 1000 segments (up to 250 segments on 2000 X-Series) with precise time-tagging between each frame, and then review them individually with automatic decoding (time-correlated decode trace AND lister) as shown in Figure 8. For this measurement example of capturing consecutive occurrences of SENT fast-channel CRC errors, it makes it much easier to measure the time between occurrences of this particular error, and also allows you to track the sensor output data each time the error is transmitted. Note that in this example of selectively capturing 1000 consecutive SENT CRC errors, the last captured error occurred over 200 seconds after the first captured error. Capturing this much data using conventional oscilloscope memory (non-segmented) would have required 300 Mpoints of acquisition memory.

Only Battery-Operated Oscilloscopes with Automotive Options



Figure 9: The Keysight 6000 Series oscilloscope with battery and automotive bus options.

Although segmented memory acquisition is also available on some other vendor's oscilloscopes, Keysight's implementation of segmented memory acquisition in the InfiniiVision Series oscilloscope not only automatically decodes frames, but is also the only scope that displays decoded frames from segmented acquisitions in the protocol lister display.

To learn more about segmented memory applications, download Keysight's application note titled, "Segmented Memory for Serial Bus Applications" listed at the end of this document.

Automotive systems must often be tested in the "field", and sometimes under real driving situations. Keysight's 6000 Series oscilloscope shown in Figure 9 is the only scope on the market today that comes with a battery option AND serial bus options that are common in the automotive industry.

Only Oscilloscopes with FlexRay Physical Layer Conformance Test Software and with Complete Test Reporting

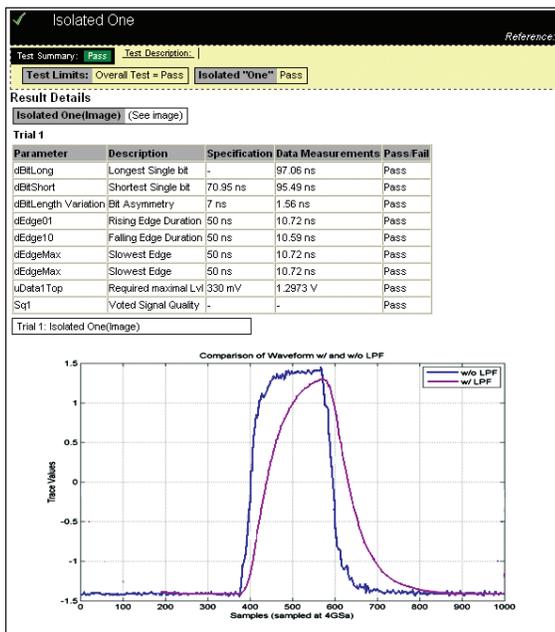


Figure 10: Test report from Keysight's FlexRay Physical Layer Conformance Test software package.

The FlexRay option on the Keysight InfiniiVision 3000, 4000 and 6000 X-Series oscilloscopes comes standard with the FlexRay Physical Layer Conformance Test software package that runs on a PC connected to the scope. This is the oscilloscope industry's most comprehensive FlexRay Physical Layer test package with complete test reporting as shown in Figure 10.

Lowest Price Oscilloscopes with the CAN/LIN Serial Bus Options

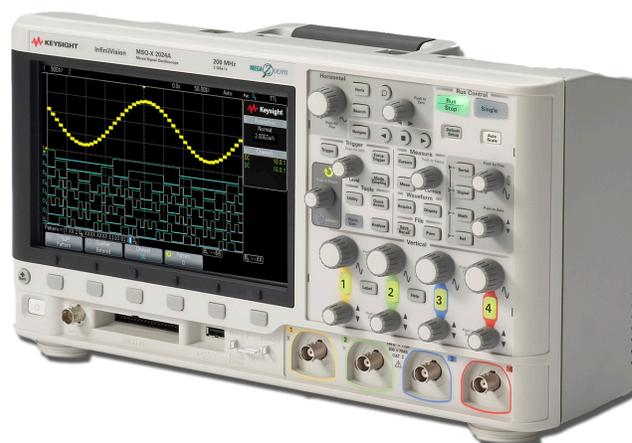


Figure 11: Keysight's DSOX2002A oscilloscope.

Keysight's 2000 X-Series oscilloscopes are the lowest priced scopes on the market today that provide serial bus triggering and hardware-based decoding for the CAN and LIN buses. Customers can purchase a two channel, 70-MHz bandwidth DSOX2002A (shown in Figure 11) with the DSOX2AUTO CAN/LIN trigger and decode option for approximately US\$1800. No other vendor's scope on the market today can come close to this entry-level price-point while supporting these automotive serial bus options with hardware-based decoding.

To learn more about Keysight's InfiniiVision 2000 X-Series oscilloscopes, download the "InfiniiVision 2000 X-Series Oscilloscopes" data sheet listed at the end of this document.

Summary

All of today's major oscilloscope vendors offer options for triggering on, decoding, and searching data on the CAN, LIN, and FlexRay serial buses. So you have choice. This document focused on showing you what's unique and different about Keysight's InfiniiVision Series oscilloscopes. Many of the unique capabilities of Keysight's scopes will

help you characterize and debug the physical layer of automotive serial faster. To learn more about Keysight's InfiniiVision Series oscilloscopes, refer to the data sheets and application notes listed below. To view short videos focused on automotive applications, go to www.keysight.com/find/scopes-auto.


Related Literature

Publication title	Publication type	Publication number
InfiniiVision 2000 X-Series Oscilloscopes	Data Sheet	5990-6618EN
InfiniiVision 3000 X-Series Oscilloscopes	Data Sheet	5990-6619EN
InfiniiVision 4000 X-Series Oscilloscopes	Data Sheet	5991-1103EN
InfiniiVision 6000 X-Series Oscilloscopes	Data Sheet	5991-4087EN
Serial Bus Applications for InfiniiVision X-Series Oscilloscopes	Data Sheet	5990-6677EN
Oscilloscope Waveform Update Rate Determines Probability of Capturing Elusive Events	Application Note	5989-7885EN
Debug Automotive Designs Faster with CAN-dbc Symbolic Trigger and Decode	Application Note	5991-2847EN
CAN Eye-diagram Mask Testing	Application Note	5991-0484EN
FlexRay Eye-diagram Mask Testing	Application Note	5990-4923EN
Using Segmented Memory for Serial Bus Applications	Application Note	5990-5817EN

To download these documents, insert the publication number in the URL:
<http://literature.cdn.keysight.com/litweb/pdf/XXXX-XXXEN>

Product Web site

For the most up-to-date and complete application and product information, please visit our product Web site at:
www.keysight.com/find/morescope

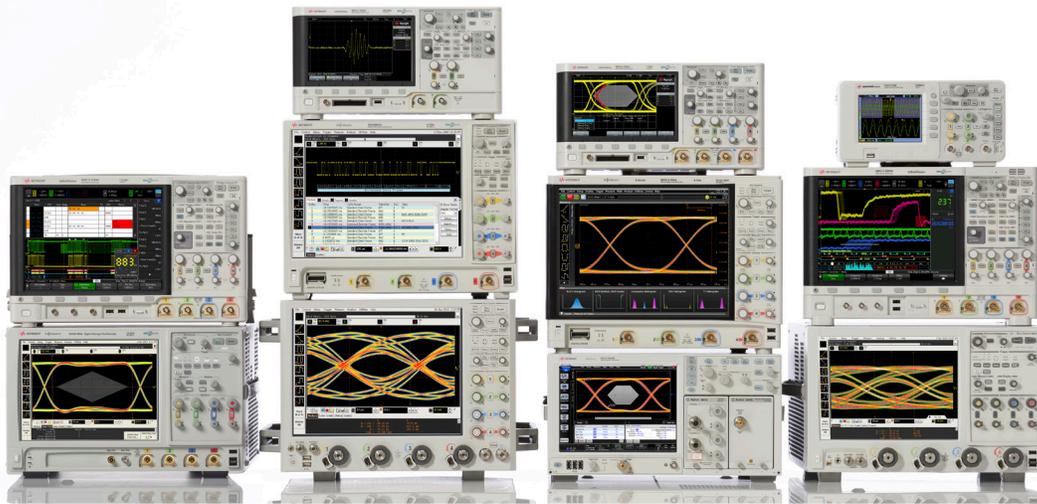

Keysight Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axistandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System



Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/2000X-Series

www.keysight.com/find/3000X-Series

www.keysight.com/find/4000X-Series

www.keysight.com/find/6000X-Series

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-09-04-14)

